

DLRS350-1K12V (Product No.:107201570101)

Summary

DLRS350-1K12V is a 350W single output metal chassis power supply. This series of power supplies have the characteristics of universal universal input voltage range, AC / DC dual-use, high cost performance, low power consumption, high efficiency, high reliability, and safe isolation. The product is safe and reliable, and has good EMC performance, providing a cost-effective solution for various industrial power supplies.

Product Features

- Full range AC input (90-132VAC/180-264VAC)
- Input voltage range: 240-373VDC[switch at 230 gear]
- Support 300vac surge input for 5 seconds
- Low power consumption, high efficient
- Small size, ultra low height 30mm
- Working temperature: -30 C ~ +70 C
- Short circuit/ Over current/ over voltage protections
- Meet IEC/EN/UL62368、EN60335、GB4943 certification standards
- Meet 5000m altitude applications
- Low ripple noise, low power consumption, and high efficiency
- Over voltage level III



Application



Wall Washer



LED Strip Light



LED Tube



Underground Light



AR111 Venture Light




MR16


Technical Paramaters

Model	DLRS350-1K12V				
Input	Efficiency		84%@230VAC, Full load		
	Voltage		low[Switch 115]:90-132VAC	High[Switch 230]:180-264VAC	Dc Input[Switch 230]:240-373VDC
	Voltage Frequency		47/63Hz		
	Current(max)		7Amax@115VAC	3.5Amax@230VAC	
	Inrush Current(max)		Cold start,60A@230VAC		
	Leakage current		0.75mA@240VAC		
Output	Current / Voltage / Power		29A/12VDC/348W		
	Output Voltage Range		10.2~13.8V		
	normal temperature Capacitive Load(max)		4000		
	R & N (Max)		150mVp-p		
	Channel		1		
	Current Tolerance	0-100% Load	±1.5%		
	Line regulation	rated load	±0.5%		
	Load regulation	0-100% Load	±1%		
	Temperature drift coefficient		±0.03%		
	Start-up delay		1500ms max, at115Vac	1500ms max, at230Vac	
	Rise time		50ms max, at115Vac	50ms max, at230Vac	
	Hot Swap		Not support		
Protection	Short Circuit		Close output , recovers automatically after fault removed		
	Over current		105~125%Io , recovers automatically		
	Over Voltage		13.8-17V protection voltage range, shut down the output voltage during protection, and restart after the remaining power in the power supply is discharged.		
Safety testing	Isolation voltage (1minute , Leakage current<10mA)		Input-Output>3000VAC,Input-Earth >2000VAC,Output-Earth >500VAC		
	SIR (500VDC/25 C /70%RH)		Input-Output,Input-Earth,Output-Earth >100M Ohms.		
Others	Working Temp.		-30 ~+70℃		
	Storage Temp.; Humidity		10~95%RH, No condensation environment, -40~+85℃		
	Safety standards		IEC/EN/UL62368/EN60335/GB4943		
	Material		Metal		
	IP Rating		IP20		
	MTBF		>300K hrs. MIL-HDBK-217(25℃)		
	Switching frequency		65K Hz		
	Pack Information		Net weight:690g±5%/PCS; 15PCS/Carton; 11.4kg±5%/Carton; Carton Size:364*227*179mm(L*W*H)		
	Dimension		215*115*30mm		

Circuit diagram

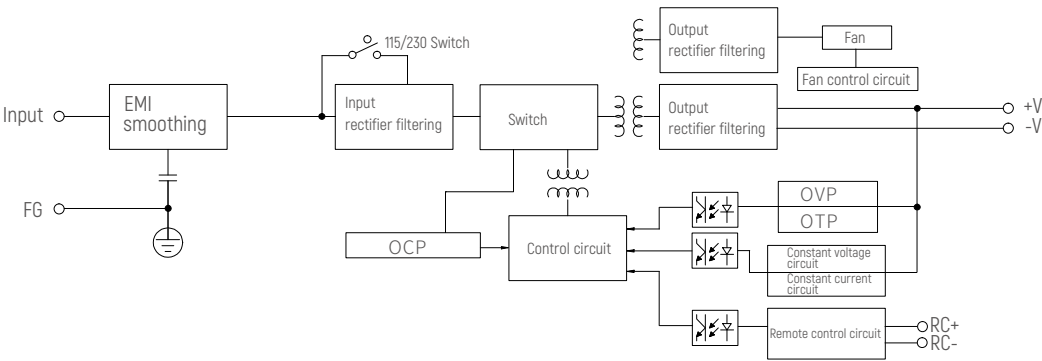


Dimension(mm)

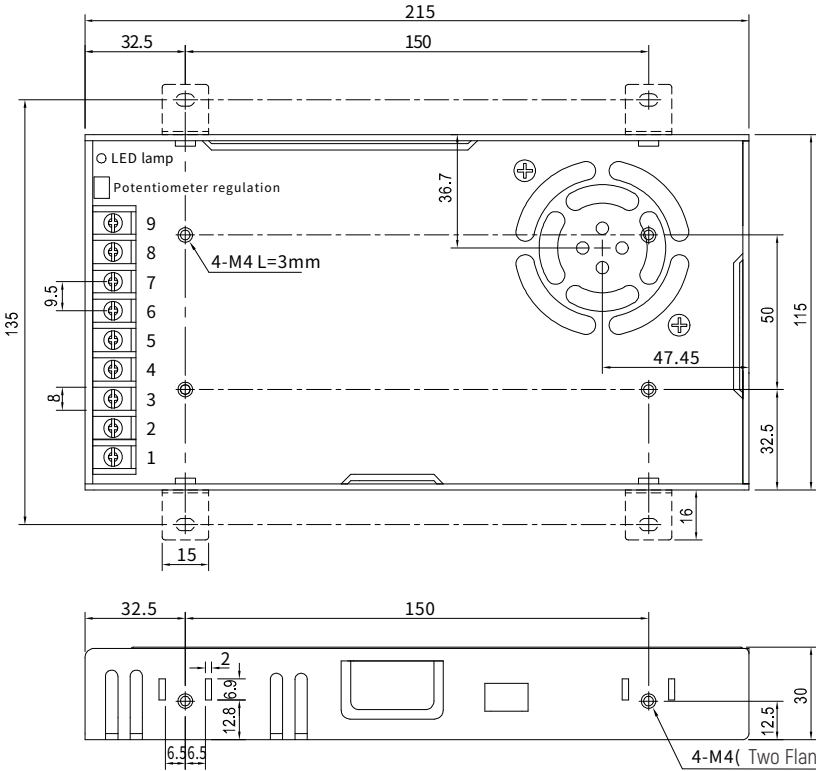

unit of size: mm
Wire Diameter: 22-14AWG
Torque: M3, 0.5N·m

Terminal	
Terminal number	Function
1	AC/L
2	AC/N
3	FG $\perp$
4,5,6	-Vo
7,8,9	+Vo

Product characteristic curve

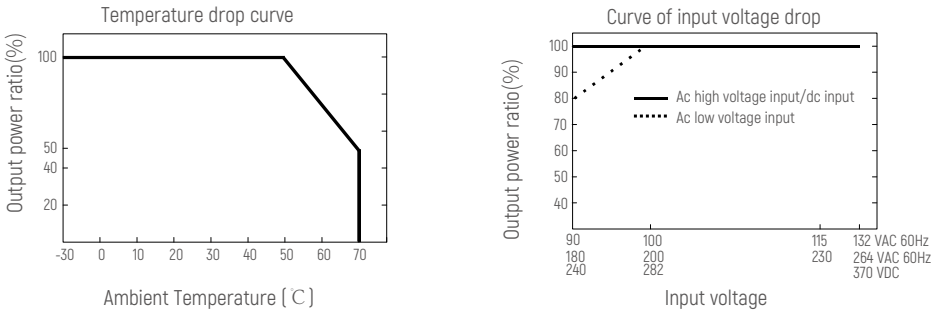

Remarks:

1. Unless otherwise specified, the test conditions of the parameters in the specification are: input voltage 230VAC, rated load, Ta = 25 °C, humidity <75%RH
2. When working above 2000m (6500ft), the temperature is declined 5 °C / 1,000m
3. Our company can provide customized products according to customer needs, please contact our sales for details.
4. When the product terminal is used, the shell must be connected to the system PE .
5. The power supply should be considered as a part of the system. All EMC tests will test the sample on an aluminum plate with a thickness of 1mm, a length of 36cm, and a width of 36mm.

※ The contents of this manual are updated without prior notice. If the function of the product you are using is inconsistent with the instructions, the function of the product shall prevail.Please contact us if you have any questions .

DLRS350-1K12V (产品代码:107201570101)

概述

DLRS350-1K12V是一款350W单组输出金属机壳式电源。该系列电源具有全球通用输入电压范围、交直流两用、高性价比、低功耗、高效率、高可靠性、安全隔离等特点。产品安全可靠，EMC性能好，为各种工业电源提供了一个高性价比的解决方案。

产品特点

- 输入电压范围可选90-132VAC/180-264VAC
- 直流输入电压范围：240-373VDC(开关置于230档位)
- 可承受300vac浪涌输入5秒
- 低功耗，高效率
- 体积小，超低高度30mm
- 工作温度范围：-30℃~+70℃
- 输出短路/过电流/过电压保护
- 符合IEC/EN/UL62368、EN60335、GB4943认证标准
- 满足5000m海拔应用
- 低纹波噪声，低功耗，高效率
- 过电压等级III



应用



洗墙灯



LED灯带



LED硬灯条



地埋灯



AR111斗胆灯




MR16


技术参数

型号	DLRS350-1K12V				
输入	效率		84%@230VAC, 满载		
	电压		低压段[开关置于115]:90-132VAC	高压段[开关置于230]:180-264VAC	直流输入[开关置于230]:240-373VDC
	电压频率		47/63Hz		
	电流		7Amax@115VAC	3.5Amax@230VAC	
	浪涌电流		冷启动60A@230VAC		
	漏电流		0.75mA@240VAC		
输出	电流/电压/功率		29A/12VDC/348W		
	输出电压调节范围		10.2~13.8V		
	常温下最大容性负载		4000		
	波纹		150mVp-p		
	通道		1		
	电流精度	0-100%负载	±1.5%		
	线性调节率	额定负载	±0.5%		
	负载调节率	0-100%负载	±1%		
	温度漂移系数		±0.03%		
	启动延时		1500ms max, at115Vac	1500ms max, at230Vac	
	上升时间		50ms max, at115Vac	50ms max, at230Vac	
	热插拔		不支持		
保护	短路		打嗝，去除故障后可恢复		
	过流		105~125%Io，自恢复		
	过压		保护电压范围13.8V~17V,保护时关断输出电压，待电源内余电放尽后可重启恢复		
安规测试	隔离电压（1分钟，漏电流<10mA）		输入-输出>3000VAC,输入-地>2000VAC，输出-地>500VAC		
	绝缘阻抗（500VDC/25℃/70%RH）		输入-输出,输入-地，输出-地>100M Ohms.		
其它	工作温度		-30℃ ~+70℃，具体参考温度降曲线图		
	储存温度、湿度		-40~+85℃, 10~95%RH,无结露环境		
	安全标准		设计符合IEC/EN/UL62368/EN60335/GB4943		
	材质		金属		
	防水等级		IP20		
	MTBF		>300K hrs. MIL-HDBK-217[25℃]		
	开关频率		65K Hz		
	包装信息		净重: 690g±5%/PCS; 15PCS/Cartron; 11.4kg±5%/箱; 外箱尺寸: 364*227*179mm[长*宽*高]		
	尺寸		215*115*30mm		

线路框图

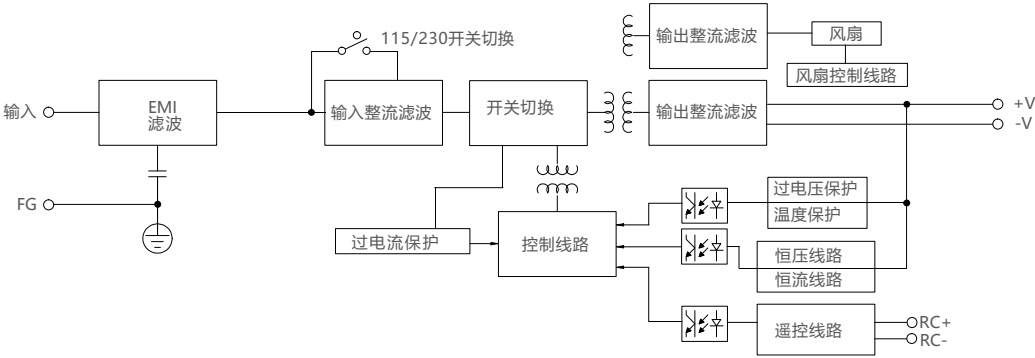

机构尺寸

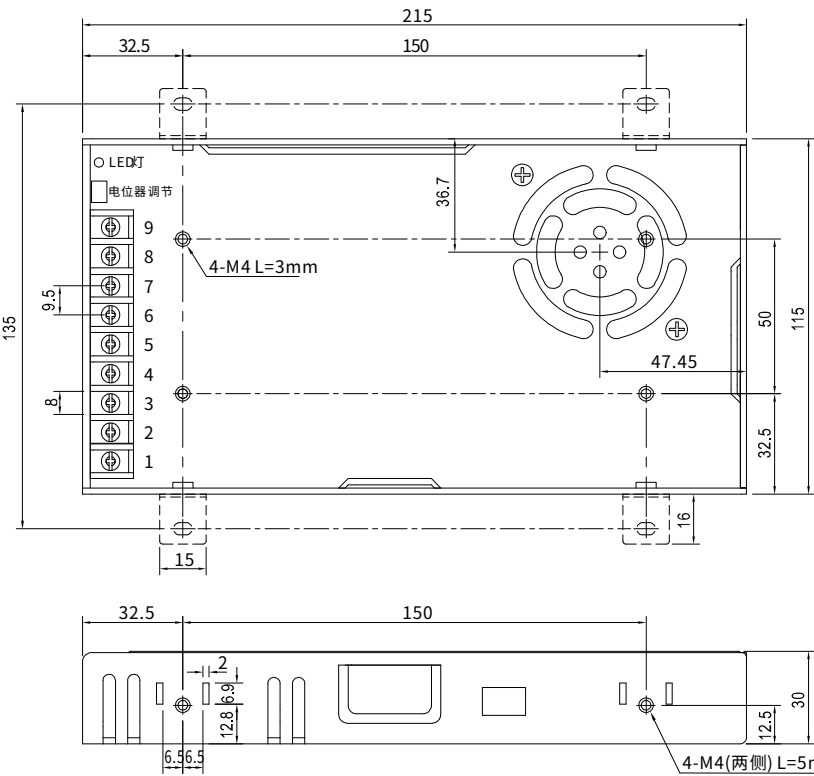


尺寸单位: mm
接线线径: 22-14AWG
扭力大小: M3, 0.5N·m

引脚功能定义

引脚编号	功能
1	AC/L
2	AC/N
3	FG $\perp$
4,5,6	-Vo
7,8,9	+Vo

产品特性曲线

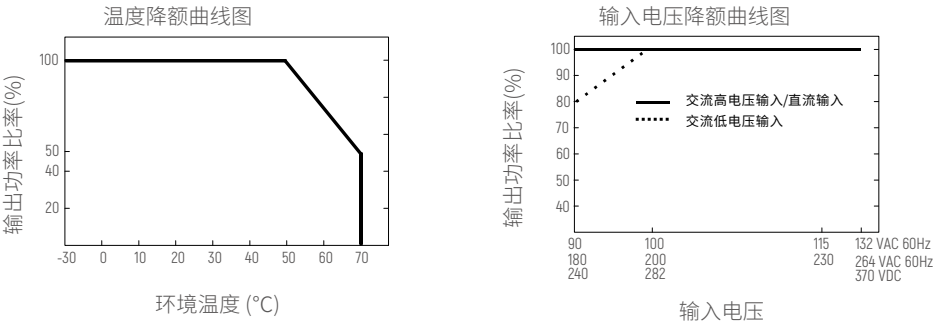

备注:

- 1. 如无特别说明, 规格书内参数的测试条件为: 输入电压230VAC, 额定负载, Ta=25°C, 湿度<75%RH
- 2. 当工作于海拔2000m (6500ft) 以上时, 温度降额5°C/1000米
- 3. 我司可按客户需求提供定制产品, 具体请联系我司业务
- 4. 产品终端使用时, 外壳需与系统PE连接
- 5. 电源应视为系统内元件的一部分, 所有的EMC测试都将测试样品安装在一个厚度1mm, 长36cm, 宽36mm的铝板上测试

※ 本说明书内容如有更新, 恕不另行通知。若您使用的产品功能与说明书不一致时, 请以产品为准。如有疑问请与我们联系。