

EUP40A-2HMC (Product No.:103101160101)

Summary

EUP40A-2HMC is a 40W AC/DC constant current mode output LED driver featuring the multiple levels selectable by DIP switch.

Product Features

- Two channel output, output current level selectable by DIP S.W.
- High efficiency up to 88 %
- Built-in active PFC function
- Protections: Short circuit, over load, over Voltage
- Suitable for indoor LED lighting application, such as down light, panel light, and so on




Application




Technical Paramaters

Model	EUP40A-2HMC																																																																	
Input	Efficiency	88%@230VAC,Full load																																																																
	Voltage	220VAC-240VAC																																																																
	Frequency Range(Hz)	50/60Hz																																																																
	Power Factor	≥0.95@230VAC,Full load																																																																
	THD(full load)	<10%@230VAC, Full load																																																																
	AC Current(max)	0.21Amax@230VAC																																																																
	Standby power	<0.5W																																																																
	Inrush Current(max)	Cold start,18.5A@230VAC																																																																
Output	Current(mA)/Voltage (VDC)	750mA/9-45VDC/33.75W		800mA/9-45VDC/36W		850mA/9-45VDC/38.25W		900mA/9-44VDC/39.6W																																																										
	Power(W)	950mA/9-42VDC/39.9W		1000mA/9-40VDC/40W		1050mA/9-38VDC/39.9W		1100mA/9-36VDC/39.6W																																																										
	Ripple Current	<3%		Current Selection Table <table><tr><td>☐</td><td>☐</td><td>☐</td><td>☐</td><td>☐</td><td>☐</td><td>☐</td><td>☐</td><td>☐</td><td>☐</td><td>☐</td></tr><tr><td>ON</td><td>OFF</td><td>1</td><td>2</td><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>750mA</td><td>800mA</td><td>850mA</td><td>900mA</td><td>950mA</td><td>1000mA</td><td>1050mA</td><td>1100mA</td><td></td></tr><tr><td></td><td></td><td>9-45V</td><td>9-45V</td><td>9-45V</td><td>9-44V</td><td>9-42V</td><td>9-40V</td><td>9-38V</td><td>9-36V</td><td></td></tr><tr><td colspan="11">Remark: Function default setting is: 750mA (@switch are all OFF state)</td></tr></table>								☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	ON	OFF	1	2	3									750mA	800mA	850mA	900mA	950mA	1000mA	1050mA	1100mA				9-45V	9-45V	9-45V	9-44V	9-42V	9-40V	9-38V	9-36V		Remark: Function default setting is: 750mA (@switch are all OFF state)										
	☐	☐	☐									☐	☐	☐	☐	☐	☐	☐	☐																																															
	ON	OFF	1									2	3																																																					
			750mA									800mA	850mA	900mA	950mA	1000mA	1050mA	1100mA																																																
			9-45V									9-45V	9-45V	9-44V	9-42V	9-40V	9-38V	9-36V																																																
Remark: Function default setting is: 750mA (@switch are all OFF state)																																																																		
Channel	2																																																																	
Current Tolerance	±5%																																																																	
No load output voltage	60V Max																																																																	
Turn on delay Time	<0.75s, at230Vac																																																																	
Function	Dimming Type	0/1-10V																																																																
	Dimming Range	0.2%-100%																																																																
	color temperature	3000k-6000k																																																																
Protection	Short Circuit	Close output, recovers automatically after fault removed																																																																
	Over Load	Reduce the output current and burp																																																																
	over Voltage	Reduce the output current and burp																																																																
Safety& EMC	Surge	L-N:1KV																																																																
	Withstand Voltage	I/P-O/P: 3750VAC/1min/5mA																																																																
	Safety Standards	GB 17625.1-2022;GB/T 17743-2021;GB/T 19510.1-2023;GB/T 19510.213-2023																																																																
	EMC Emission	EN55015, EN61000-3-2																																																																
	EMC Immunity	EN61000-4-2, 3, 4, 5, 6, 8, 11; EN61547																																																																
Others	Working Temp.	-20°C~50°C																																																																
	Storage Temp., Humidity	-40°C~85°C, 20-90%RH																																																																
	tc	78°C																																																																
	Material	PC																																																																
	IP Rating	IP20																																																																
	Lifetime	50,000h@tc:75°C																																																																
	Warranty Condition	5 Years																																																																
	Switch Cycle	>25,000 times																																																																
	Packing(weight)	Net weight: 151g±5%/PCS; 50PCS/Carton; 8.05kg±5%/Carton; Carton Size: 430*306*168mm(L*W*H)																																																																
Dimension	185*42.5*28.5mm(L*W*H)																																																																	


Dimension(mm)

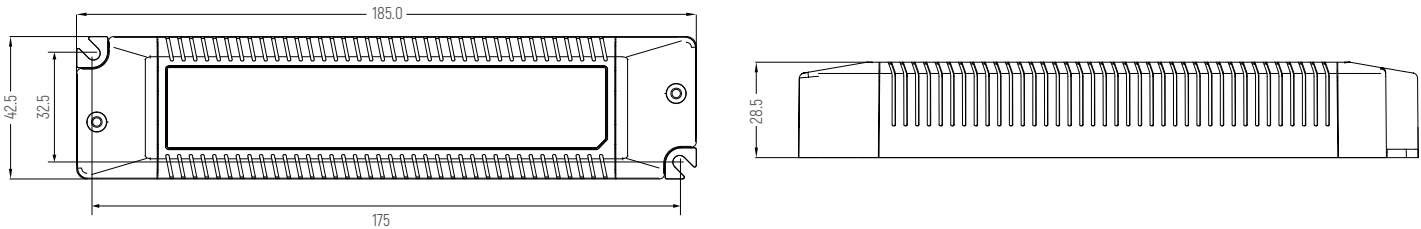


Wiring

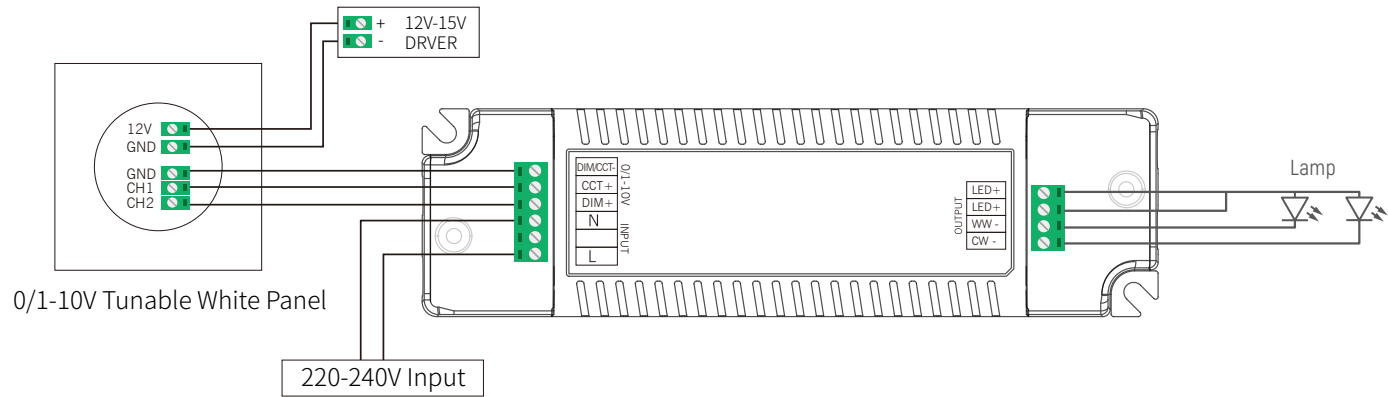


Dimming Curve



Derating Curve



Efficiency Curve

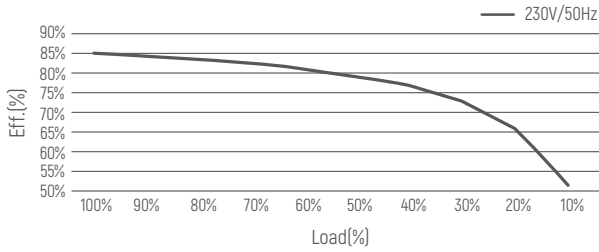

Cautions

- 1.This product should be installed by qualified personnel.
- 2.This product is non waterproof, need to avoid sun and rain.In case of outdoor use, please ensure it is mounted in a water proof enclosure.
- 3.Good heat dissipation conditions extend product life. Please install the product in a well-ventilated environment.
- 4.Please make sure LED power supply output voltage, current is used to meet the product requirements.
- 5.Please ensure that adequate sized cable is used from the controller to the LED lights to carry the current. Please also ensure that the cable is secured tightly in the connector.
- 6.Due to safety concerns, PVC or rubber cord of 0.75- 1.5mm² is recommended for input and output terminal(s)(excluding signal terminals). Flat power cord is not suitable.Ensure all wire connections and polarities are correct before applying power to avoid any damages to the LED lights.
- 7.In case of malfunction, do not repair it yourself.

EUP40A-2HMC (产品代码:103101160101)

概述

EUP40A-2HMC 是一款调光调色恒流调光驱动器，可以提供750/800/850/900/950/1000/1050/1100mA 8档电流的LED驱动器。输出电流可以通过DIP拨码开关简易设置。

产品特点

- 双道恒流输出，多级电流可选
- 效率高达 88%
- 内建主动式PFC功能
- 短路保护，过载保护，过压保护
- 适用于LED室内灯具,比如筒灯，面板灯等




应用




技术参数

型号	EUP40A-2HMC																																											
输入	效率	88%@230VAC, 满载																																										
	电压	220VAC-240VAC																																										
	频率	50/60Hz																																										
	功率因素	≥0.95@230VAC, 满载																																										
	THD	<10%@230VAC, 满载																																										
	电流	0.21Amax@230VAC																																										
	待机功耗	<0.5W																																										
	浪涌电流	Cold start,18.5A@230VAC																																										
输出	电流/电压/功率	750mA/9-45VDC/33.75W 950mA/9-42VDC/39.9W		800mA/9-45VDC/36W 1000mA/9-40VDC/40W		850mA/9-45VDC/38.25W 1050mA/9-38VDC/39.9W		900mA/9-44VDC/39.6W 1100mA/9-36VDC/39.6W																																				
	波纹电流	<3%		电流选择表 <table><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>ON</td><td>OFF</td><td>1</td><td>2</td><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>750mA 9-45V</td><td>800mA 9-45V</td><td>850mA 9-45V</td><td>900mA 9-44V</td><td>950mA 9-42V</td><td>1000mA 9-40V</td><td>1050mA 9-38V</td><td>1100mA 9-36V</td><td></td></tr></table> 备注：出厂默认设置电流为750mA(1,2,3在OFF状态)																			ON	OFF	1	2	3									750mA 9-45V	800mA 9-45V	850mA 9-45V	900mA 9-44V	950mA 9-42V	1000mA 9-40V	1050mA 9-38V	1100mA 9-36V	
	ON	OFF	1									2	3																															
			750mA 9-45V									800mA 9-45V	850mA 9-45V	900mA 9-44V	950mA 9-42V	1000mA 9-40V	1050mA 9-38V	1100mA 9-36V																										
	通道	2																																										
	电流精度	±5%																																										
空载输出电压	60V Max																																											
启动延时	<0.75s, at230Vac																																											
功能	调光方式	0/1-10V																																										
	调光范围	0.2%-100%																																										
	色温值	3000k-6000k																																										
保护	短路	关闭输出，排除故障后自恢复																																										
	过载	降低输出电流，打嗝																																										
	过压	降低输出电流，打嗝																																										
安全 & 电磁兼容	浪涌	L-N:1KV																																										
	耐压标准	I/P-O/P: 3750VAC/1min/5mA																																										
	安全标准	GB 17625.1-2022;GB/T 17743-2021;GB/T 19510.1-2023;GB/T 19510.213-2023																																										
	电磁兼容	EN55015, EN61000-3-2																																										
	EMC抗扰度	EN61000-4-2, 3, 4, 5, 6, 8, 11; EN61547																																										
其它	工作温度	-20℃~50℃																																										
	储存温度、湿度	-40℃~85℃, 20-90%RH																																										
	tc	78℃																																										
	材质	PC																																										
	防水等级	IP20																																										
	寿命	50,000小时@tc:75℃																																										
	质保	5年																																										
	开关周期	>25,000次																																										
	包装尺寸(重量)	净重: 151g±5%/PCS; 50PCS/Carton; 8.05kg±5%/箱; 外箱尺寸: 430*306*168mm[长*宽*高]																																										
	尺寸	185*42.5*28.5mm (长*宽*高)																																										


尺寸(mm)

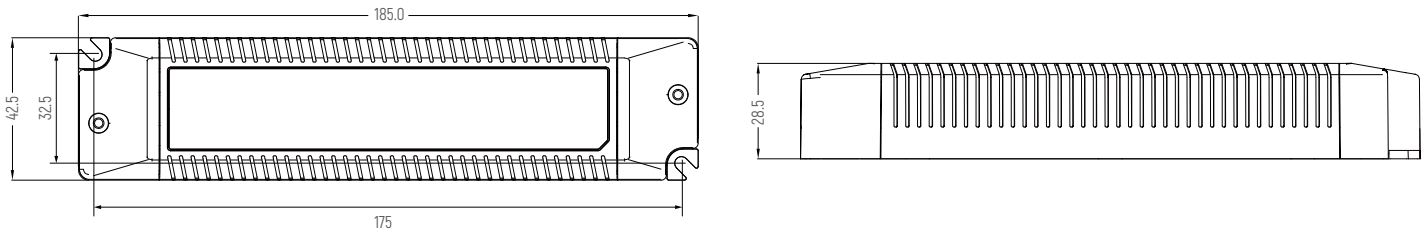


接线图

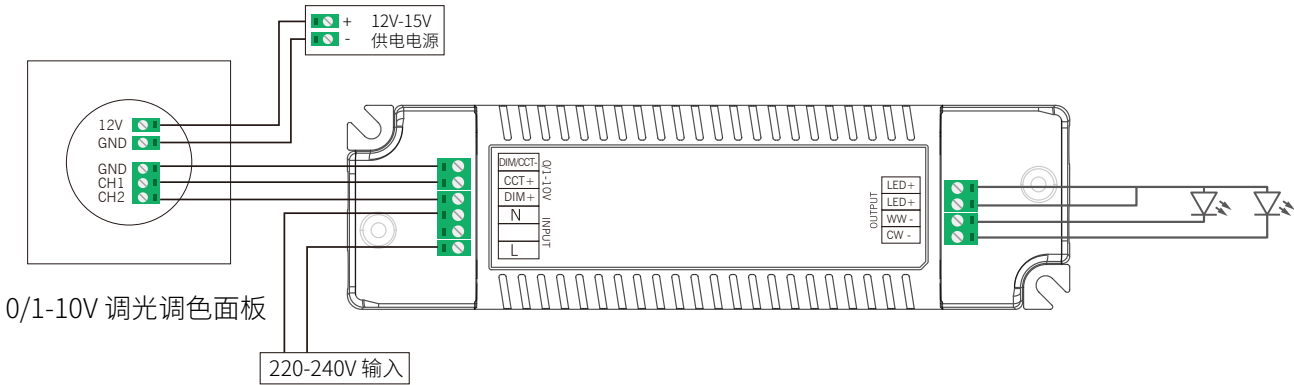


调光曲线

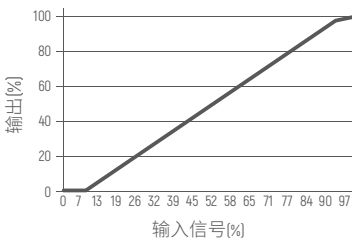

降额曲线

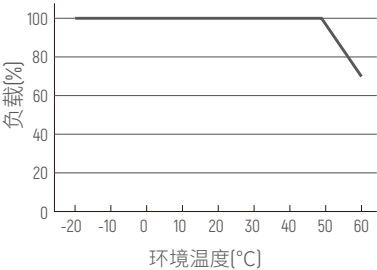

效率曲线

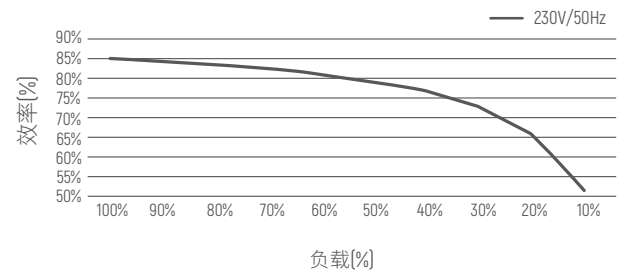

注意事项:

- 1、本产品请由具有专业资格的人员进行调试安装。
- 2、本产品不能防水，需避免日晒雨淋，如安装在户外，请用防水箱。
- 3、良好的散热条件会延长产品的使用寿命，请把产品安装在通风良好的环境。
- 4、请检查使用的LED电源输出电压电流，是否符合产品要求。
- 5、出于安全考虑，推荐输入和输出（信号端除外）用0.75-1.5mm² PVC或橡胶线缆，并确保接线牢固，以免电线过热或接触不良触发事故。扁平电源线不适用。
- 6、通电调试前，应确保所有接线正确，以避免因接线错误而导致灯具损坏。
- 7、如果发生故障，请勿私自维修；如果有疑问，请联系供应商。

※ 本说明书内容如有更新，恕不另行通知。若您使用的产品功能与说明书不一致时，请以产品为准。如有疑问请与我们联系。