

EUP45T-1WMC-0


Summary

EUP45T-1WMC-0 is a constant current mode output LED driver. The output current can be easily set via the DIP dial switch. The driver supports leading edge (Triac) and trailing edge (ELV) dimmer, and can be compatible with the systems of various brands (Philips, Panasonic, Lutron, Simon, ABB, Siemens etc.) to achieve a smooth dimming effect.

- Product Feature**
- Multi-current driver selected by Dip-switch
 - Support Leading edge (Triac) and Trailing edge (ELV) Dimmer.
 - Dimming range from 40VAC to 240C.
 - Dimming effect smooth, no flicker
 - High efficiency up to 87%
 - Output short circuit protection; over current protection
 - Suitable for indoor LED lighting application, down light, panel light, and so on




Application




Technical Parameters

Model	EUP45T-1WMC-0																																
Input	Efficiency	87%@230VAC, Full load																															
	Voltage	200VAC-240VAC																															
	Frequency	50/60Hz																															
	Power Factor	>0.5@230VAC, Full load																															
	Current	0.4Amax@230VAC, Full load																															
	Dimming voltage range	40-240VAC																															
	Inrush Current	20A@230VAC																															
Output	Current/Voltage/Power	500mA/33-65VDC/32.5W 700mA/33-65VDC/45.5W		900mA/33-50VDC/45W 1050mA/33-42VDC/44.1W																													
	Ripple Current	<3%		Current Selection Table <table><tr><td></td><td></td><td>1</td><td>2</td><td>3</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>ON</td><td>OFF</td><td>500mA</td><td>700mA</td><td>900mA</td><td>1050mA</td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>33-65V</td><td>33-65V</td><td>33-50V</td><td>33-42V</td><td></td><td></td><td></td></tr></table> Remark: Function default setting is: 500mA (@switch are all OFF state)				1	2	3						ON	OFF	500mA	700mA	900mA	1050mA						33-65V	33-65V	33-50V	33-42V			
			1			2	3																										
	ON	OFF	500mA			700mA	900mA	1050mA																									
			33-65V			33-65V	33-50V	33-42V																									
	Channel	1																															
	Current Tolerance	±7%																															
No Load Output Voltage	84V Max																																
Turn On Delay Time	<1s, at 230Vac																																
Function	Dimming Mode	Triac	ELV																														
Protection	Short Circuit	Hiccups, recovers automatically after fault condition removed																															
	Over Current	Hiccups, recovers automatically after fault condition removed																															
Others	Working Temp.	-20°C~40°C																															
	Storage Temp.; Humidity	-40°C~85°C, 20-90%RH																															
	Tc	90°C																															
	Material	PC																															
	IP Rating	IP20																															
	Lifetime	50,000h@tc:90°C																															
	Warranty Condition	5 years																															
	Switch Cycle	>25,000 times																															
	Packing Size	Net weight: 225g±5%/PCS; 50PCS/Carton; 11.75kg±5%/Carton; Carton Size: 516*337*179cm(L*W*H)																															
Dimension	137*82*31mm(L*W*H)																																


Dimension(mm)

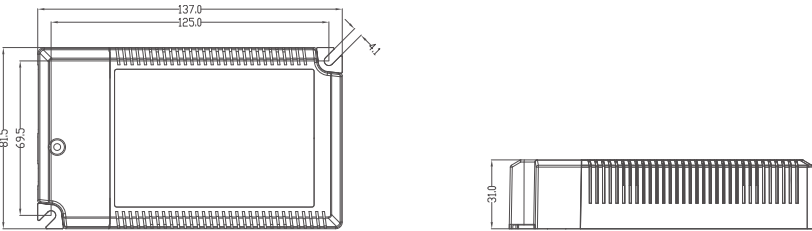


Wiring Diagram

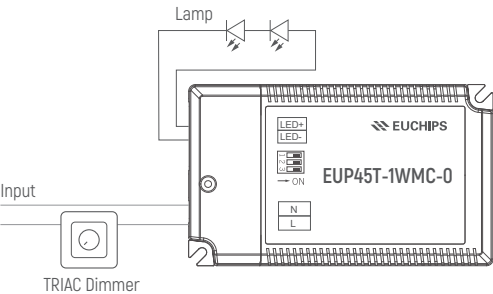


Dimming Curve

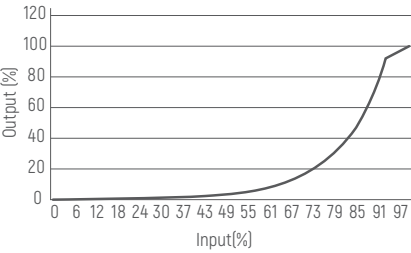

Derating Curve



Eff. vs Load



Cautions

- 1.The product shall be installed and serviced by a qualified person.
- 2.This product is non-waterproof. Please avoid the sun and rain. When installed outdoors please ensure it is mounted in a water proof enclosure.
- 3.Good heat dissipation will prolong the working life of the controller. Please ensure good ventilation.
- 4.Please check if the output voltage and current of any LED power supplies used comply with the requirement of the product.
- 5.Please ensure that adequate sized cable is used from the controller to the LED lights to carry the current. Please also ensure that the cable is secured tightly in the connector.
- 6.For safety consideration, PVC or rubber cord of 0.75-1.5mm2 is recommended for input and output terminal[s] . Flat power cord is not suitable. Ensure all wire connections and polarities are correct before applying power to avoid any damages to the LED lights.
- 7.If a fault occurs please return the product to your supplier. Do not attempt to fix this product by yourself.

※ The contents of this manual are updated without prior notice. If the function of the product you are using is inconsistent with the instructions, the function of the product shall prevail.Please contact us if you have any questions .

EUP45T-1WMC-0

概述

EUP45T-1WMC-0 是一款可以提供 500/700/900/1050mA 四档电流的 LED 驱动器。
这款驱动器支持前沿切相和后沿切相调光器，可以与兼容多品牌系统(飞利浦, ABB, 路创, 西门子, 西蒙, 松下等)配合使用，实现平滑调光的效果。

产品特点

- 单通道恒流输出，多级电流可选
- 支持前沿/后沿切相调光
- 调光电压范围：40-240VAC
- 高效率达：87%
- 调光曲线平滑，无闪烁
- 输出短路保护；过流保护
- 适用室内 LED 灯具，比如筒灯，面板灯等



应用



技术参数


型号	EUP45T-1WMC-0	
输入	效率	87%@230VAC, 满载
	电压	200VAC-240VAC
	频率	50/60Hz
	功率因素	>0.5@230VAC, 满载
	电流	0.4Amax@230VAC, 满载
	调光电压范围	40-240VAC
	浪涌电流	20A@230VAC
输出	电流/电压/功率	500mA/33-65VDC/32.5W 900mA/33-50VDC/45W 700mA/33-65VDC/45.5W 1050mA/33-42VDC/44.1W
	波纹电流	<3%
	通道	1
	电流精度	±7%
	空载输出电压	84V Max
	启动延时	<1s, at230Vac
功能	调光方式	前沿 后沿切相调光
保护	短路	打嗝，去除故障后自恢复
	过流	打嗝，故障排除后自恢复
其它	工作温度	-20°C~40°C
	储存温度、湿度	-40°C~85°C, 20-90%RH
	tc	90°C
	材质	PC
	防水等级	IP20
	寿命	50,000小时@tc:90°C
	质保	5年
	开关周期	>25,000次
	包装重量	净重: 225g±5%/个; 50个/箱; 11.75kg±5%/箱; 外箱尺寸: 516*337*179mm(L*W*H)
	尺寸	137*82*31mm(长*宽*高)

电流选择表


					
ON	OFF	500mA	700mA	900mA	1050mA
		33-65V	33-65V	33-50V	33-42V

备注：出厂默认设置电流为500mA(1,2,3在OFF状态)


产品尺寸

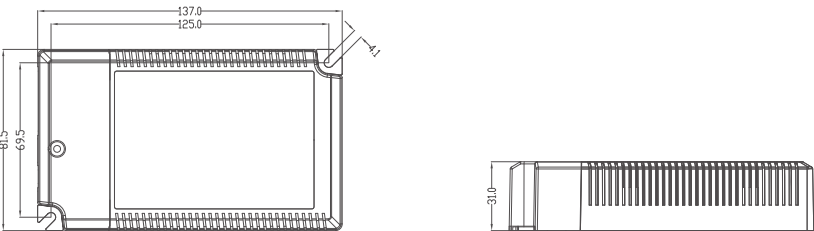


应用接线图

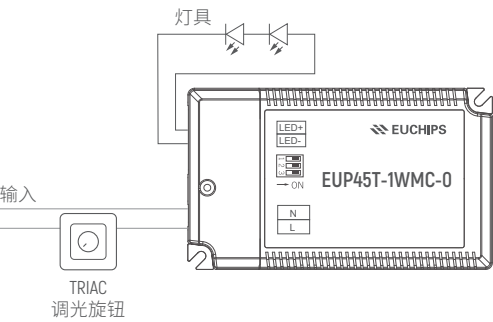


调光曲线

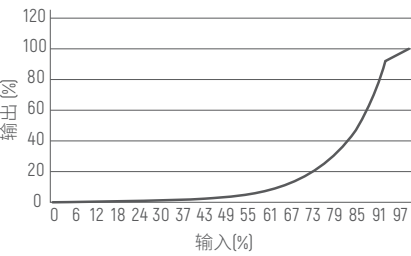

降额曲线



Eff. vs 负载



注意事项

1. 本产品请由具有专业资格的人员进行调试安装。
2. 本产品不能防水，需避免日晒雨淋，如安装在户外，请用防水箱。
3. 良好的散热条件会延长产品的使用寿命，请把产品安装在通风良好的环境。
4. 请检查使用的LED电源输出电压电流，是否符合产品要求。
5. 出于安全考虑，推荐输入和输出(信号端除外)用0.75-1.5mm2PVC或橡胶线缆，并确保接线牢固，以免电线过热或接触不良触发事故。扁平电源线不适用。
6. 通电调试前，应确保所有接线正确，避免因接线错误而导致灯具损坏。
7. 如果发生故障，请勿私自维修；如果有疑问，请联系供应商。

※ 本说明书内容如有更新，恕不另行通知。若您使用的产品功能与说明书不一致时，请以产品为准。如有疑问请与我们联系。