

EUP50D-1HMC-0

Summary

EUP50D-1HMC-0 is a constant output mode LED driver. The output current can be easily set via DIP switch, EUP50D-1HMC-0 can be connected to DALI master or Touch DIM to achieve a smooth dimming effect.

Product Features

- Single channel output, output current level selectable by DIP S.W.
- Meet DALI Protocol IEC 62386
- Support Touch-DIM function
- High input voltage of 220VAC ~ 240VAC
- High efficiency up to 88%
- Built-in active PFC function
- Dimming effect smooth, no flicker
- Protections: Short circuit, over load, over temperature
- Suitable for indoor LED lighting application, such as down light, panel light, and so on




Application




Technical Paramaters

Model	EUP50D-1HMC-0																																																																																																																																																																							
Input	Efficiency	88%@230VAC,Full load																																																																																																																																																																						
	Voltage	220VAC-240VAC																																																																																																																																																																						
	Frequency Range(Hz)	50/60Hz																																																																																																																																																																						
	Power Factor	≥0.95@230VAC,Full load																																																																																																																																																																						
	THD(full load)	<10%@230VAC, Full load																																																																																																																																																																						
	AC Current(max)	0.28Amax@230VAC																																																																																																																																																																						
	Standby power	<0.5W																																																																																																																																																																						
	No load power	<0.5W																																																																																																																																																																						
	Inrush Current(max)	Cold start,40A(twidth=12.8 us measured at 50% Ipeak)@230VAC																																																																																																																																																																						
Output	Current(mA)/Voltage (VDC) Power[W]	1050mA/9-45VDC/47.25W 1100mA/9-45VDC/49.5W	1150mA/9-43VDC/49.45W 1200mA/9-42VDC/50.4W	1250mA/9-40VDC/50W 1300mA/9-38VDC/49.4W	1350mA/9-37VDC/49.95W 1400mA/9-36VDC/50.4W																																																																																																																																																																			
	Ripple Current	<3%	Current Selection Table <table><tr><td> </td><td> </td><td> 1 2 3 </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr><tr><td>Channel</td><td>1</td></tr><tr><td>Current Tolerance</td><td>±5%</td></tr><tr><td>No load output voltage</td><td>55V Max</td></tr><tr><td>Turn on delay Time</td><td><1.5s, at230Vac</td></tr><tr><td colspan="10">Remark: Function default setting is: 1050mA (@switch are all OFF state)</td></tr><tr><td>Function</td><td>Dimming Type</td><td colspan="8">DALI /Touch DIM(Push DIM)</td></tr><tr><td rowspan="3">Protection</td><td>Short Circuit</td><td colspan="8">Close output, recovers automatically after fault removed</td></tr><tr><td>Over Load</td><td colspan="8">When the output voltage is exceeded, the output current decreases and, recovers automatically when the load is reduced.</td></tr><tr><td>Over Temperature</td><td colspan="8">Shut down the output, recovers automatically when temp. back to normal.</td></tr><tr><td rowspan="9">Others</td><td>Working Temp.</td><td colspan="8">-20°C~50°C</td></tr><tr><td>Storage Temp., Humidity</td><td colspan="8">-40°C~85°C, 20-90%RH</td></tr><tr><td>Tc</td><td colspan="8">85°C</td></tr><tr><td>Material</td><td colspan="8">ABS</td></tr><tr><td>IP Rating</td><td colspan="8">IP20</td></tr><tr><td>Lifetime</td><td colspan="8">50,000h@tc:75°C</td></tr><tr><td>Warranty Condition</td><td colspan="8">5 Years</td></tr><tr><td>Switch Cycle</td><td colspan="8">>100,000 tims</td></tr><tr><td>Packing(weight)</td><td colspan="8">Net weight: 225g±5%/PCS; 50PCS/Carton;11.75kg±5%/Carton; Carton Size: 517*337*179mm(L*W*H)</td></tr><tr><td>Dimension</td><td colspan="8">137*82*31mm(L*W*H)</td></tr></table>										1 2 3									Channel	1	Current Tolerance	±5%	No load output voltage	55V Max	Turn on delay Time	<1.5s, at230Vac	Remark: Function default setting is: 1050mA (@switch are all OFF state)										Function	Dimming Type	DALI /Touch DIM(Push DIM)								Protection	Short Circuit	Close output, recovers automatically after fault removed								Over Load	When the output voltage is exceeded, the output current decreases and, recovers automatically when the load is reduced.								Over Temperature	Shut down the output, recovers automatically when temp. back to normal.								Others	Working Temp.	-20°C~50°C								Storage Temp., Humidity	-40°C~85°C, 20-90%RH								Tc	85°C								Material	ABS								IP Rating	IP20								Lifetime	50,000h@tc:75°C								Warranty Condition	5 Years								Switch Cycle	>100,000 tims								Packing(weight)	Net weight: 225g±5%/PCS; 50PCS/Carton;11.75kg±5%/Carton; Carton Size: 517*337*179mm(L*W*H)								Dimension	137*82*31mm(L*W*H)							
											1 2 3																																																																																																																																																													
	Channel	1																																																																																																																																																																						
	Current Tolerance	±5%																																																																																																																																																																						
	No load output voltage	55V Max																																																																																																																																																																						
	Turn on delay Time	<1.5s, at230Vac																																																																																																																																																																						
Remark: Function default setting is: 1050mA (@switch are all OFF state)																																																																																																																																																																								
Function	Dimming Type	DALI /Touch DIM(Push DIM)																																																																																																																																																																						
Protection	Short Circuit	Close output, recovers automatically after fault removed																																																																																																																																																																						
	Over Load	When the output voltage is exceeded, the output current decreases and, recovers automatically when the load is reduced.																																																																																																																																																																						
	Over Temperature	Shut down the output, recovers automatically when temp. back to normal.																																																																																																																																																																						
Others	Working Temp.	-20°C~50°C																																																																																																																																																																						
	Storage Temp., Humidity	-40°C~85°C, 20-90%RH																																																																																																																																																																						
	Tc	85°C																																																																																																																																																																						
	Material	ABS																																																																																																																																																																						
	IP Rating	IP20																																																																																																																																																																						
	Lifetime	50,000h@tc:75°C																																																																																																																																																																						
	Warranty Condition	5 Years																																																																																																																																																																						
	Switch Cycle	>100,000 tims																																																																																																																																																																						
	Packing(weight)	Net weight: 225g±5%/PCS; 50PCS/Carton;11.75kg±5%/Carton; Carton Size: 517*337*179mm(L*W*H)																																																																																																																																																																						
Dimension	137*82*31mm(L*W*H)																																																																																																																																																																							


DALI Wiring

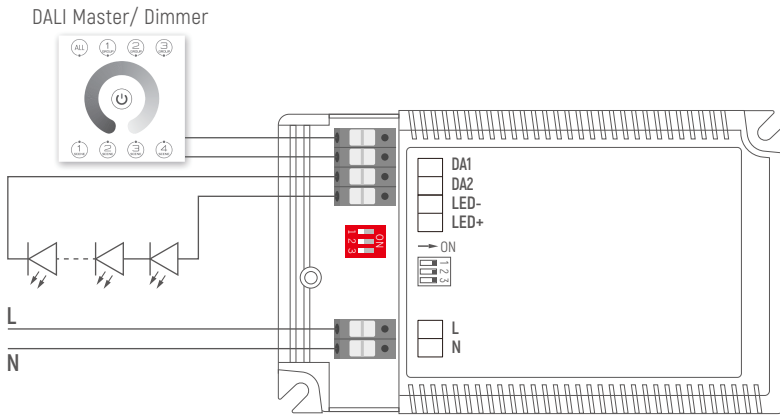

DALI Diagram

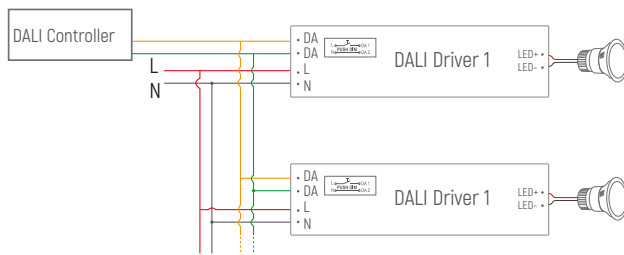

Push DIM(Touch DIM) Diagram

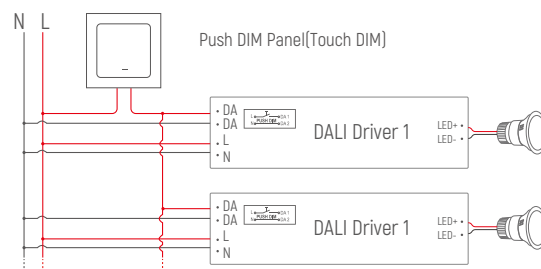


Remark: Only use open push button without indicator light. Maximum cable length between each Unit: 20 meters.


Push DIM Function

1. Press the Push DIM (Touch DIM) switch for 8s or more, the driver can be controlled via Push DIM switch.
2. Short press the Push DIM (Touch DIM) switch (<0.5s) to control the lamp on or off.
3. Long press the Push DIM (Touch DIM) switch (>0.5s) to dim the brightness of light. The dimming direction will change every time after pressing switch.
4. Double-click the Push DIM (Touch DIM) switch (<0.3s), then all lamps connected on the device will be set maximum brightness.
5. The brightness adjustment range is 1%-100%, and the light can be turned off through short pressing when doing the adjustment with long pressing Push DIM (Touch DIM) switch.
6. With the Power off memory function, the power-down state will be recovered when power on again.


Dimming Curve

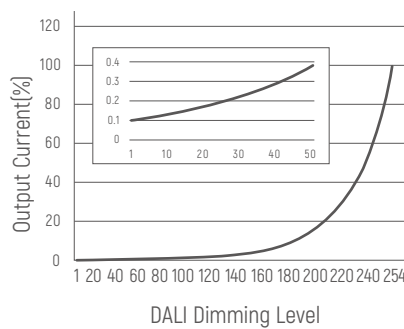

Derating Curve

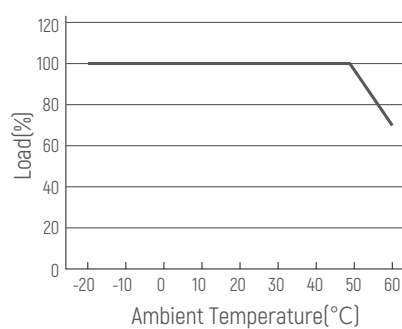

PF vs Load

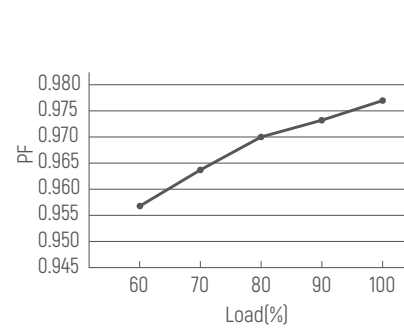

Cautions

1. This product should be installed by qualified personnel.
2. DALI and Touch-DIM functions can not be used at the same time.
3. This product is non waterproof, need to avoid sun and rain. In case of outdoor use, please ensure it is mounted in a water proof enclosure.
4. Good heat dissipation conditions extend product life. Please install the product in a well-ventilated environment.
5. Please make sure LED power supply output voltage, current is used to meet the product requirements.
6. Please ensure that adequate sized cable is used from the controller to the LED lights to carry the current. Please also ensure that the cable is secured tightly in the connector.
7. Due to safety concerns, PVC or rubber cord of 0.75-2.5mm² is recommended for input and output terminal(s) (excluding signal terminals). Flat power cord is not suitable. Ensure all wire connections and polarities are correct before applying power to avoid any damages to the LED lights.
8. In case of malfunction, do not repair it yourself.

※ The contents of this manual are updated without prior notice. If the function of the product you are using is inconsistent with the instructions, the function of the product shall prevail. Please contact us if you have any questions.

EUP50D-1HMC-0

概述

EUP50D-1HMC-0是一款可以提供1050/1100/1150/1200/1250/1300/1350/1400mA 8档电流的LED驱动器。输出电流可以通过DIP拨码开关简易设置，可以通过外加DALI主控或Touch DIM开关实现平滑的调光效果。


产品特点

- 单通道恒流输出，多级电流可选
- 遵循DALI协议标准 IEC62386
- 支持Touch-DIM功能
- 高电压输入：220VAC ~ 240VAC
- 效率高达 88%
- 内建主动式PFC功能
- 短路保护，过载保护，过温保护
- 适用于LED室内灯具,比如筒灯，面板灯等


技术参数

型号	EUP50D-1HMC-0																																																																																																																																																															
输入	效率	88%@230VAC, 满载																																																																																																																																																														
	电压	220VAC-240VAC																																																																																																																																																														
	频率	50/60Hz																																																																																																																																																														
	功率因素	≥0.95@230VAC, 满载																																																																																																																																																														
	THD	<10%@230VAC, 满载																																																																																																																																																														
	电流	0.28Amax@230VAC																																																																																																																																																														
	待机功耗	<0.5W																																																																																																																																																														
	空载功耗	<0.5W																																																																																																																																																														
	浪涌电流	冷启动, 40A(在 50%Ipeak下测试twidth=12.8us)@230VAC																																																																																																																																																														
输出	电流/电压/功率	1050mA/9-45VDC/47.25W 1100mA/9-45VDC/49.5W		1150mA/9-43VDC/49.45W 1200mA/9-42VDC/50.4W		1250mA/9-40VDC/50W 1300mA/9-38VDC/49.4W		1350mA/9-37VDC/49.95W 1400mA/9-36VDC/50.4W																																																																																																																																																								
	波纹电流	<3%		电流选择表 <table><tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr><tr><td>通道</td><td colspan="2">1</td></tr><tr><td>电流精度</td><td colspan="2">±5%</td></tr><tr><td>空载输出电压</td><td colspan="2">55V Max</td></tr><tr><td>启动延时</td><td colspan="2"><1.5s, at230Vac</td></tr><tr><td>功能</td><td>调光方式</td><td colspan="8">DALI/Touch DIM(Push DIM)</td></tr><tr><td rowspan="3">保护</td><td>短路</td><td colspan="8">关断输出, 移除故障后自恢复</td></tr><tr><td>过载</td><td colspan="8">超过输出电压时, 输出电流下降,减轻负载自动恢复</td></tr><tr><td>过温</td><td colspan="8">关闭输出, 温度 恢复后, 电源正常工作</td></tr><tr><td rowspan="10">其它</td><td>工作温度</td><td colspan="8">-20°C~50°C</td></tr><tr><td>储存温度、湿度</td><td colspan="8">-40°C~85°C, 20-90%RH</td></tr><tr><td>tc</td><td colspan="8">85°C</td></tr><tr><td>材质</td><td colspan="8">ABS</td></tr><tr><td>防水等级</td><td colspan="8">IP20</td></tr><tr><td>寿命</td><td colspan="8">50,000小时@tc:75°C</td></tr><tr><td>质保</td><td colspan="8">5年</td></tr><tr><td>开关周期</td><td colspan="8">>100,000次</td></tr><tr><td>包装尺寸(重量)</td><td colspan="8">净重: 225g±5%/PCS; 50PCS/Carton; 11.75kg±5%/箱; 外箱尺寸: 517*337*179mm[长*宽*高]</td></tr><tr><td>尺寸</td><td colspan="8">137*82*31mm (长*宽*高)</td></tr></table>																通道	1		电流精度	±5%		空载输出电压	55V Max		启动延时	<1.5s, at230Vac		功能	调光方式	DALI/Touch DIM(Push DIM)								保护	短路	关断输出, 移除故障后自恢复								过载	超过输出电压时, 输出电流下降,减轻负载自动恢复								过温	关闭输出, 温度 恢复后, 电源正常工作								其它	工作温度	-20°C~50°C								储存温度、湿度	-40°C~85°C, 20-90%RH								tc	85°C								材质	ABS								防水等级	IP20								寿命	50,000小时@tc:75°C								质保	5年								开关周期	>100,000次								包装尺寸(重量)	净重: 225g±5%/PCS; 50PCS/Carton; 11.75kg±5%/箱; 外箱尺寸: 517*337*179mm[长*宽*高]								尺寸	137*82*31mm (长*宽*高)							
	通道	1																																																																																																																																																														
	电流精度	±5%																																																																																																																																																														
	空载输出电压	55V Max																																																																																																																																																														
	启动延时	<1.5s, at230Vac																																																																																																																																																														
功能	调光方式	DALI/Touch DIM(Push DIM)																																																																																																																																																														
保护	短路	关断输出, 移除故障后自恢复																																																																																																																																																														
	过载	超过输出电压时, 输出电流下降,减轻负载自动恢复																																																																																																																																																														
	过温	关闭输出, 温度 恢复后, 电源正常工作																																																																																																																																																														
其它	工作温度	-20°C~50°C																																																																																																																																																														
	储存温度、湿度	-40°C~85°C, 20-90%RH																																																																																																																																																														
	tc	85°C																																																																																																																																																														
	材质	ABS																																																																																																																																																														
	防水等级	IP20																																																																																																																																																														
	寿命	50,000小时@tc:75°C																																																																																																																																																														
	质保	5年																																																																																																																																																														
	开关周期	>100,000次																																																																																																																																																														
	包装尺寸(重量)	净重: 225g±5%/PCS; 50PCS/Carton; 11.75kg±5%/箱; 外箱尺寸: 517*337*179mm[长*宽*高]																																																																																																																																																														
	尺寸	137*82*31mm (长*宽*高)																																																																																																																																																														


尺寸(mm)

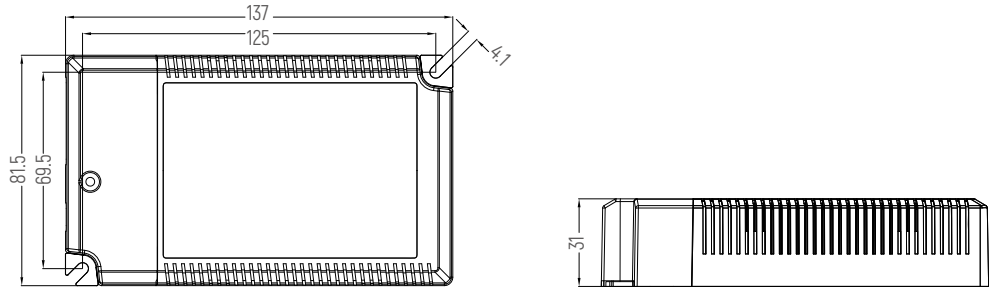


接线图

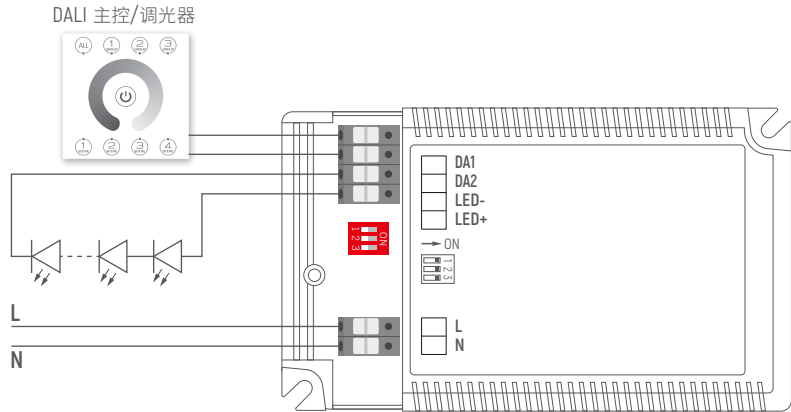

DALI应用图

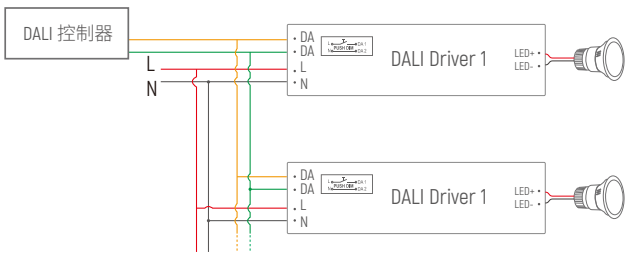

Push DIM (Touch DIM)应用图

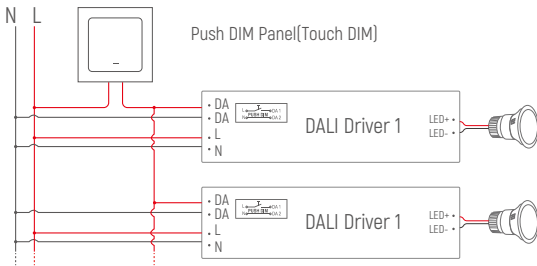


备注: 只能使用开路的按压式开关(不带指示灯). 采用同步连线时每个设备和设备之间的线长不超过20米.


Push DIM 功能

1. 长按Push DIM(Touch DIM)开关8s, 进入Push DIM (Touch DIM)模式。
2. 短按Push DIM (Touch DIM)开关 (<0.5秒) 进行灯的亮暗控制。
3. 长按Push DIM (Touch DIM)开关 (>0.5秒) 进行灯具的亮度调节, 光是调亮还是调暗, 随着每次按压的开关变化而变换。
4. 双击Push DIM (Touch DIM)开关 (<0.3秒), 连接的所有灯具将达到最亮状态。
5. 亮度调节范围为1%-100%.
6. 具有断电记忆功能, 重新上电将恢复到上一次断电的状态。


调光曲线

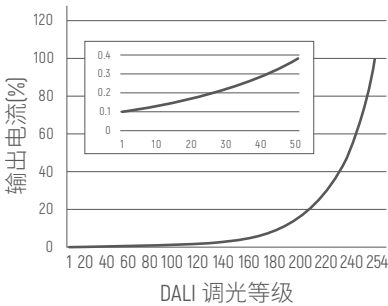

降额曲线

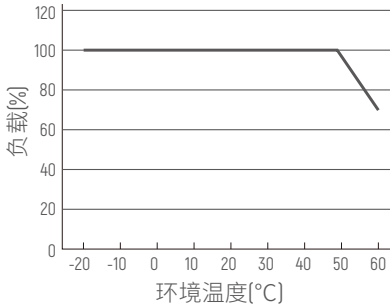

PF vs 负载

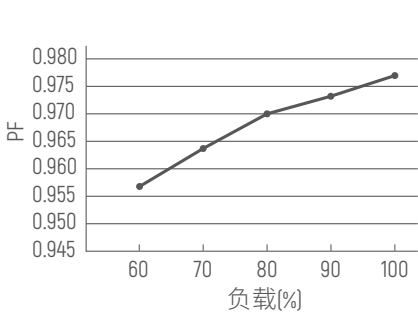

注意事项

1. 本产品请由具有专业资格的人员进行调试安装。
2. DALI 和Touch-DIM 功能不能同时使用。
3. 本产品不能防水, 需避免日晒雨淋, 如安装在户外, 请用防水箱。
4. 良好的散热条件会延长产品的使用寿命, 请把产品安装在通风良好的环境。
5. 请检查使用的LED电源输出电压电流, 是否符合产品要求。
6. 出于安全考虑, 推荐输入和输出(信号端除外)用0.75-1.5mm²PVC或橡胶线缆, 并确保接线牢固, 以免电线过热或接触不良触发事故。扁平电源线不适用。
7. 通电调试前, 应确保所有接线正确, 以避免因接线错误而导致灯具损坏。
8. 如果发生故障, 请勿私自维修; 如果有疑问, 请联系供应商。

※ 本说明书内容如有更新, 恕不另行通知。若您使用的产品功能与说明书不一致时, 请以产品为准。如有疑问请与我们联系。