

LD400-2H12V
LD400-2H24V

Product Feature

- Aluminium Casing
- Ultra-low start up temp -30°C
- Ultra-light and easy to install
- High efficiency up to 85%
- High reliability
- Wide input Voltage 180~264Vac



CE RoHS



Application



Light box



LED Strip Light



LED Tube



Astigmatism Source

Technical Parameters

Model		LD400-2H12V	LD400-2H24V
Input	Efficiency	85%	86%
	Voltage	200-240VAC	
	Frequency	50Hz	
	Current	Max 4.0A @ 230Vac	
	Inrush Current	Less than 70A/230Vac, cold start	
	Leakage Current	<0.75mA/240Vac	
Output	Current	33A	16.7A
	Voltage	12VDC	24VDC
	Power	400W	
	Ripple & noise	300mVp-p	300mVp-p
	Output Voltage range	22.8 ~ 25.2V	
	Voltage Tolerance	±5%	
	Line Regulation	1%	
	Load Regulation	2%	
	Channel	2	
Protection	Turn On Delay Time	1.5S, 20mS@230Vac	
	Short Circuit	Hiccup mode, Auto-recovery	
	Over Load	110% ~ 150% of rated load.	
Safety	Withstand Voltage	Input-FG: 1500Vac or 2121Vdc, Input-Output: 1500Vac or 2121Vdc, Output-FG: 500Vac or 707Vdc	
	Isolation Resistance	Input-FG: >100MΩ 500Vdc @25°C & 70RH; I/P-O/P: >100MΩ 500Vdc @25°C & 70RH; O/P-FG: >100MΩ 500Vdc @25°C & 70RH	
Others	Working Temp.	-30~+60°C, 20~90%	
	Storage Temp.; Humidity	-30°C~+70°C, 10%-95%RH	
	Material	Metal	
	IP Rating	IP20	
	Lifetime	40,000h@tc:65°C	
	Warranty Condition	2 Years	
	Switch Cycle	>15,000 times	
	Packing Size	Net weight: 530g±5%/PCS; 50PCS/Carton; 28.86kg±5%/Carton; Carton Size: 360*290*315mm(L*W*H)	
	Dimension	333*53*23mm(L*W*H)	

Dimension(mm)



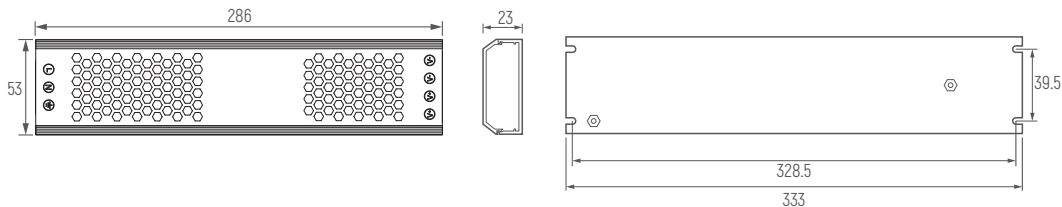



Diagram Wiring

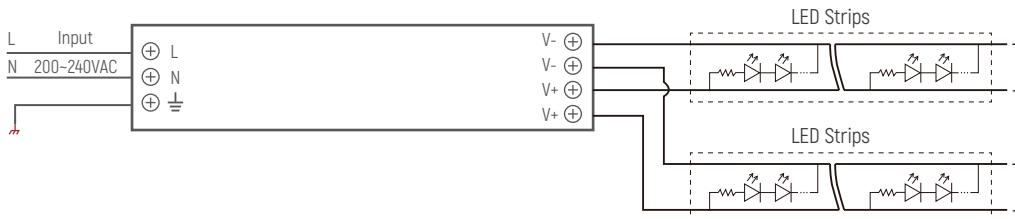

Derating Curve

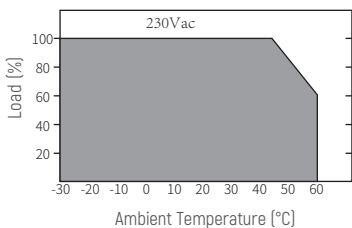

Static characteristic Curve



Cautions

1. This product should be debugged and installed by professionally qualified personnel.
2. This product not waterproof, avoid be exposed to the sun and rain. If installed outdoors, use a waterproof case.
3. Excellent dissipation of heat condition will prolong the product lifetime, please install the product in a well ventilated environment.
4. Please check the output voltage and current of the LED power supply, whether meet product requirement.
5. Use the diameter of wire must be able to load connected LED lamps, and ensure the connection is firm, avoid wires overheat or poor connect caused accident.
6. Before debugging, ensure all wires are corrected connection, avoid lamp damage caused by wiring errors.
- 7 Installed on metal surface, power supply needs strict grounding, prevent leakage and shock.
- 8 If happen break down, Please don t self-repairing; if have question, please contact the supplier.

※ The contents of this manual are updated without prior notice. If the function of the product you are using is inconsistent with the instructions, the function of the product shall prevail. Please contact us if you have any questions.

LD400-2H12V
LD400-2H24V

产品特点

- {铝外壳}
- 超低温启动(-30℃)
- 易安装
- 效率达到85%
- 高可靠性
- 宽电压180~264VAC



CE RoHS



应用



灯箱



LED灯带



LED硬灯条




漫反射光源


技术参数

型号		LD400-2H12V	LD400-2H24V
输入	效率	85%	86%
	电压	200-240VAC	
	频率	50Hz	
	电流	Max 4A@230Vac	
	浪涌电流	冷启动，小于75A/230Vac	
	漏电流	<0.75mA/240Vac	
输出	电流	33A	16.7A
	电压	12VDC	24VDC
	功率	400W	
	纹波和噪声	300mVp-p	300mVp-p
	输出电压调整范围	22.8 ~ 25.2V	
	电压精度	±5%	
	电源调整率	1%	
	负载调整率	2%	
	通道	2	
启动延时	1.5S, 20mS@230Vac		
保护	短路	打嗝模式，异常条件移除后自动恢复	
	过载	过载保护范围为额定输出功率的110~150%	
安全	耐压测试	Input-FG: 1500Vac or 2121Vdc, Input-Output: 1500Vac or 2121Vdc, Output-FG: 500Vac or 707Vdc	
	绝缘测试	Input-FG: >100MΩ 500Vdc @25°C &70RH; I/P-O/P: >100MΩ 500Vdc @25°C &70RH; O/P-FG: >100MΩ 500Vdc @25°C &70RH	
其它	工作温度	-30~+60°C, 20~90%	
	储存温度、湿度	-30°C~+70°C, 10%~95%RH	
	材质	金属	
	防水等级	IP20	
	寿命	40,000h@tc:65°C	
	质保	2年	
	开关周期	>15,000次	
	包装重量	净重: 530g±5%/个; 50个/箱; 28.86kg±5%/箱; 外箱尺寸: 360*290*315mm[长*宽*高]	
产品尺寸	333*53*23mm[长*宽*高]		


产品尺寸(mm)

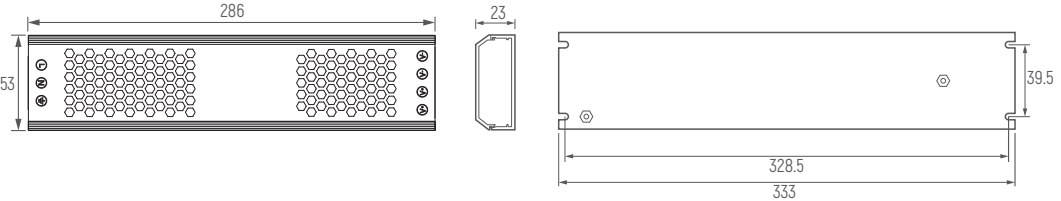


应用接线图

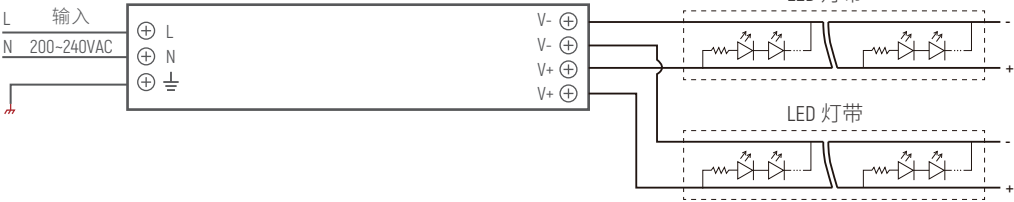

降额曲线

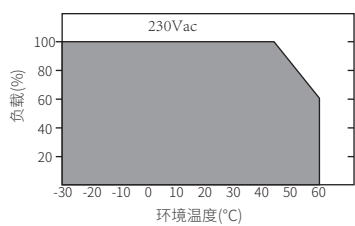

静态特性曲线



注意事项

1. 本产品请由具有专业资格的人员进行调试安装。
2. 本产品不能防水，需避免日晒雨淋，如安装在户外，请用防水箱。
3. 良好的散热条件会延长产品的使用寿命，请把产品安装在通风良好的环境。
4. 请检查使用的LED电源输出电压电流，是否符合产品要求。
5. 使用的电线直径大小必须能够足够负载连接的LED灯具，并确保接线牢固，以免电线过热或接触不良触发事故。
6. 通电调试前，应确保所有接线正确，以避免因接线错误而导致灯具损坏。
7. 安装在金属表面，电源应严格可靠接地，以防漏电触电。
8. 如果发生故障，请勿私自维修；如有疑问，请联系供应商。

※ 本说明书内容如有更新，恕不另行通知。若您使用的产品功能与说明书不一致时，请以产品为准。如有疑问请与我们联系。