

PCP40D-1WMC(102101140101)

Summary

PCP40D-1WMC is a constant current output mode LED driver. Support DALI dimming function, Touch DIM (Push DIM) function. The output and dimming circuit are also completely in accordance with the new regulations with isolation to ensure the users and luminaire system during installation.

Product Features

- Single channel output, output current level selectable by DIP S.W.
- Support DALI dimming function, Touch DIM (Push DIM) function
- Dimming range: 1-100%, Dimming effect smooth, no flicker
- Protections: Short circuit, Over load, No Load, Over voltage
- Suitable for indoor LED lighting application



Application




Technical Paramaters


Model	PCP40D-1WMC				
Input	Efficiency	88%@230VAC, Full load			
	Voltage	100VAC-277VAC			
	Frequency Range(Hz)	50/60Hz			
	Power Factor	>0.9@230VAC, Full load			
	THD(full load)	20%@230VAC			
	AC Current(max)	0.25Amax@230VAC			
	Standby power	<0.5W			
Output	Inrush Current(max)	Cold start, 30A(twidth=250us measured at 50% Ipeak)@230VAC			
	Current/Voltage/Power	*350mA/9-48V/3.15-16.8W	600mA/9-48V/28.8W	800mA/9-48V/38.4W	900mA/9-44V/39.6W
		*500mA/9-48V/24W	700mA/9-48V/33.6W	850mA/9-47V/39.95W	1050mA/9-38V/39.9W
	Ripple Current	<2%			
	Channel	1			
	Current Tolerance	±5%			
	Voltage Range	9-48V			
Function	No load Voltage	60V			
	Turn on delay Time	<0.75s, at 230Vac			
	Dimming Type	DALI/Push-Dim			
Protection	Dimming Range	1%-100% Dimming to off			
	Short Circuit	Close output, recovers automatically after fault removed			
	Over Load	Hiccup, recovers automatically after fault removed			
	No Load	Stand by			
Safety & EMC	Over Voltage	When the output voltage is exceeded, the output current decreases and, recovers automatically when the load is reduced.			
	Surge	L&N:1KV;			
	Withstand Voltage	I/P-O/P: 3750VAC/1min/10mA;			
	DALI Standard	EN 62386-101 (DALI-2), EN 62386-102 (DALI-2), EN 62386-207 (DALI-2)			
	Safety Standards	EN61347-1, EN61347-2-13			
Others	EMC Eission	EN55015			
	EMC Immunity	EN61000-3-2, EN61000-3-3, EN6154			
	Working Temp., Humidity	-20°C~+55°C, 10-90%RH			
	Storage Temp., Humidity	-25°C~+85°C, 5-95%RH			
	Tc	80°C			
	Material	PC			
	IP Rating	IP20			
	Lifetime	50,000h@tc:80°C			
	MTTF	>1,000,000h			
	Warranty Condition	5 Years			
	Switch Cycle	>25,000 tims			
	Packing(weight)	Net weight: 162g±5%/PCS; 75PCS/Carton; 12.65kg±5%/Carton; Carton Size: 359*322*173mm(L*W*H)			
	Dimension	103*68*30mm(L*W*H)			

*Constant Current Tolerance 350mA ±8%; 500mA ±7%;


Dimension(mm)

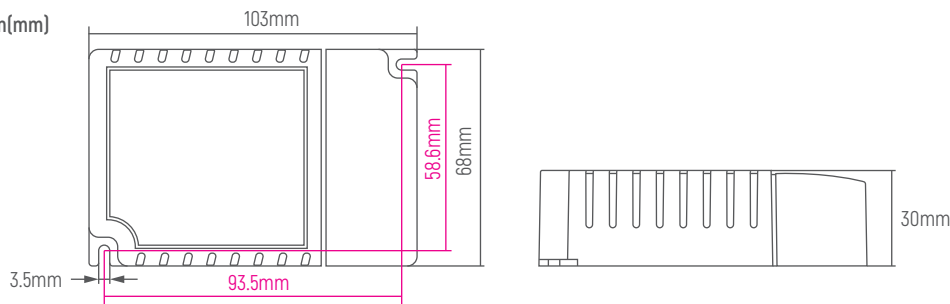

Label:



Wiring Diagram

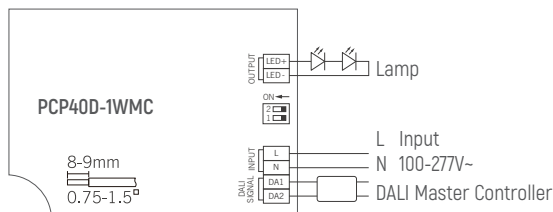


Current Selection Table

PCP40D-1WMC is a multi-current dimming driver, output current level selectable by DIP S.W., as the following:

ON	OFF	1	2	3	4	5	6	7	8	9	10
		350mA	500mA	600mA	700mA						
		9-48V	9-48V	9-48V	9-48V						
		800mA	850mA	900mA	1050mA						
		9-48V	9-47V	9-44V	9-38V						

Remark: Function default setting is: 350mA (@switch are all OFF state)

Curve

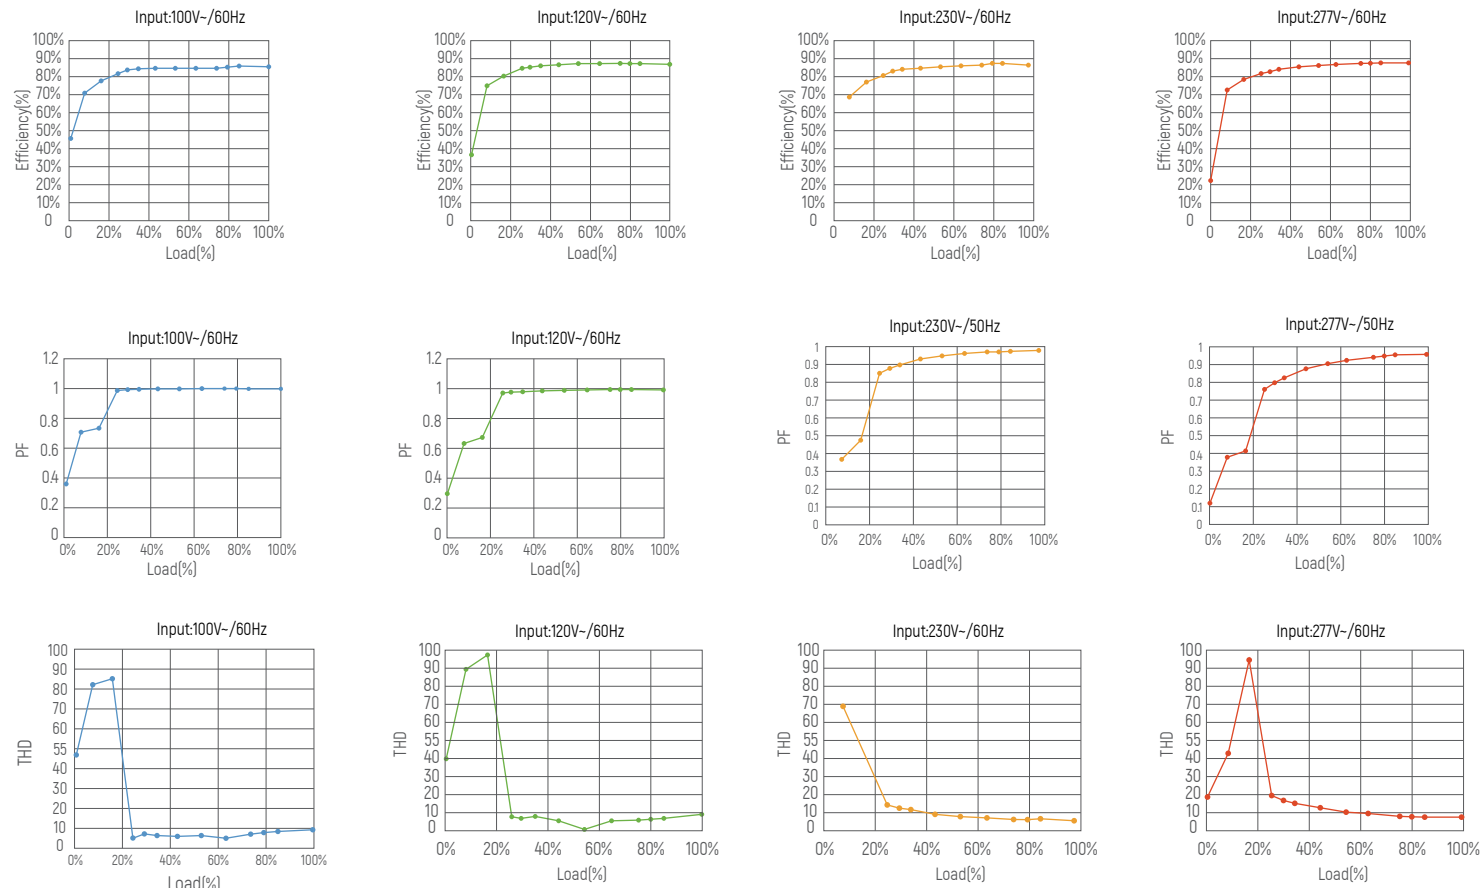

Cautions

- 1.This product should be installed by qualified personnel.
- 2.This product is non waterproof, need to avoid sun and rain.In case of outdoor use, please ensure it is mounted in a water proof enclosure.
- 3.Good heat dissipation conditions extend product life.Please install the product in a well-ventilated environment.
- 4.Please make sure LED power supply output voltage, current is used to meet the product requirements.
- 5.Please ensure that adequate sized cable is used from the controller to the LED lights to carry the current. Please also ensure that the cable is secured tightly in the connector.
- 6.Due to safety concerns, PVC or rubber cord of 0.75-1.5mm² is recommended for input and output terminal(s) (excluding signal terminals). Flat power cord is not suitable.Ensure all wire connections and polarities are correct before applying power to avoid any damages to the LED lights.
- 7.In case of malfunction, do not repair it yourself.

PCP40D-1WMC(102101140101)

概述

PCP40D-1WMC是一款恒流输出模式LED驱动器。输出和调光电路完全符合新规定，隔离，确保用户和灯具系统在安装过程中使用。

产品特点

- 单通道输出，输出电流电平可通过DIP S.W.选择。
- 支持DALI调光功能, 触摸调光(按键调光)功能
- 调光范围：1-100%, 调光效果平滑，无闪烁
- 保护：短路、过载、空载、过压
- 适用于室内LED照明应用，如筒灯、聚光灯、面板灯等



应用




技术参数


产品型号	PCP40D-1WMC				
输入	效率	88%@230VAC, 满载			
	电压	100VAC-277VAC			
	频率	50/60Hz			
	功率因数	>0.9@230VAC, 满载			
	THD	20%@230VAC			
	电流	0.25Amax@230VAC			
	待机功耗	<0.5W			
	浪涌电流	冷启动, 30A(在 50%Ipeak 下测twidth=250us)@230VAC			
输出	电流/电压/功率	*350mA/9-48V/16.8W *500mA/9-48V/24W	600mA/9-48V/28.8W 700mA/9-48V/33.6W	800mA/9-48V/38.4W 850mA/9-47V/39.95W	900mA/9-44V/39.6W 1050mA/9-38V/39.9W
	低频纹波电流(<120Hz)	<2%			
	通道	1			
	电流精度	±5%			
	电压范围	9-48V			
	空载电压	60V			
	启动延时	<0.75s, at 230Vac			
功能	调光方式	DALI/Push-Dim			
	调光范围	1%-100% 可调灭			
保护	短路	关闭输出，故障排除后自动恢复			
	过载	打嗝，故障移除后自动恢复。			
	空载	待机			
	过压	当超过输出电压时，输出电流减小，负载减小时自动恢复。			
安全与电磁兼容	浪涌	L&N:1KV;			
	耐受电压	I/P-O/P: 3750VAC/1min/10mA;			
	DALI标准	EN 62386-101 (DALI-2), EN 62386-102 (DALI-2), EN 62386-207 (DALI-2)			
	安全标准	EN61347-1, EN61347-2-13			
	电磁兼容	EN55015			
其它	EMC电磁抗扰度	EN61000-3-2, EN61000-3-3, EN6154			
	工作温度	-20°C~+55°C, 10-90%RH			
	储存温度	-25°C~+85°C, 5-95%RH			
	Tc	80°C			
	材质	PC			
	防水等级	IP20			
	寿命	50,000小时@tc:80°C			
	MTTF	>1,000,000小时			
	质保期	5年			
	开关机次数	>25,000次			
	装箱尺寸	净重: 162g±5%/个; 75个/箱; 12.65kg±5%/箱; 外箱尺寸: 359*322*173毫米(长*宽*高)			
	产品尺寸	103*68*30mm毫米(长*宽*高)			

*恒流精度350mA ±8%; 500mA ±7%;


尺寸(mm)

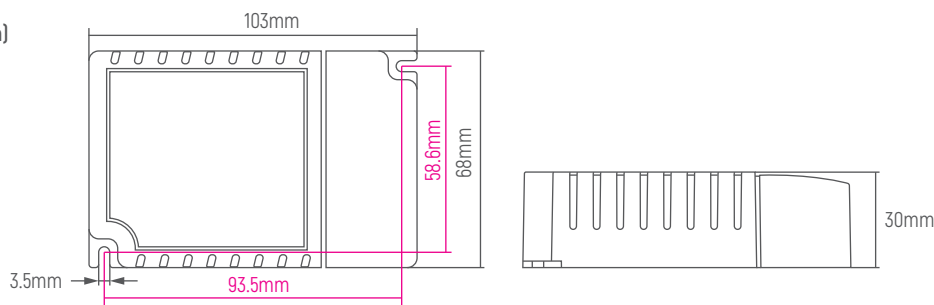

丝印:



应用接线图

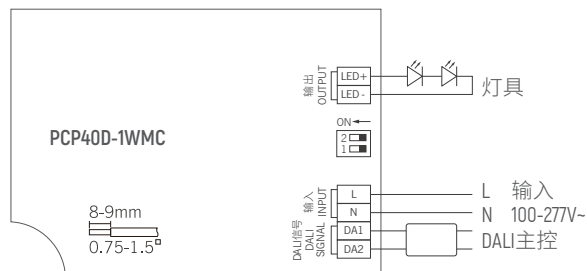


电流选择表

PCP40D-1WMC是一个多电流调光驱动器，输出电流可通过DIP S.W.选择，如下所示：

ON	OFF	1	2	3	4	5	6	7	8	9	10
		350mA	500mA	600mA	700mA						
		9-48V	9-48V	9-48V	9-48V						
		800mA	850mA	900mA	1050mA						
		9-48V	9-47V	9-44V	9-38V						

备注：出厂默认设置电流为350mA (1,2在OFF状态)

曲线

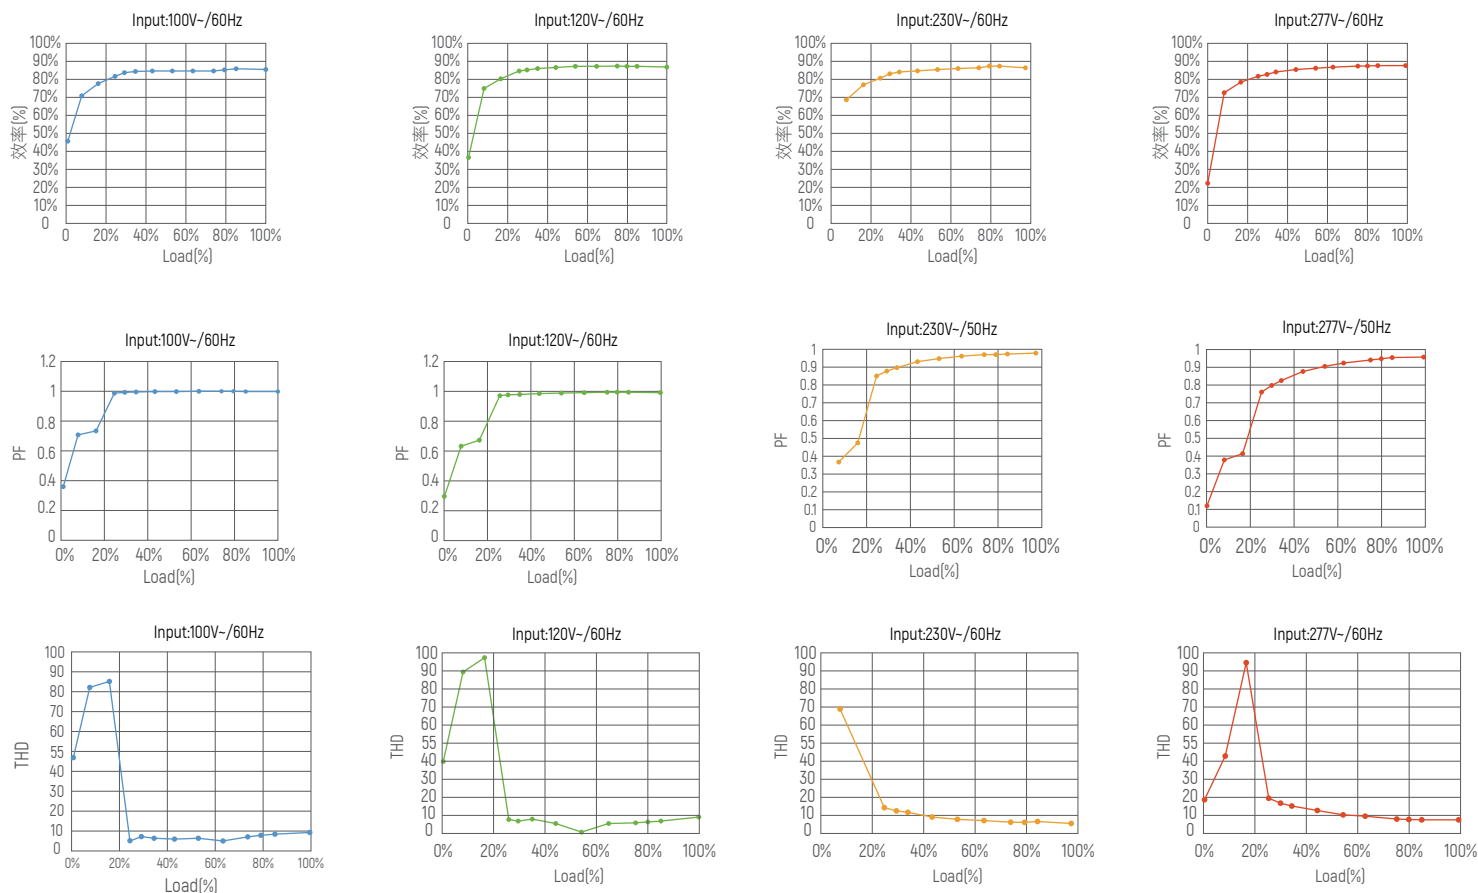

注意事项:

1. 本产品请由具有专业资格的人员进行调试安装。
2. 本产品不能防水，需避免日晒雨淋，如安装在户外，请用防水箱。
3. 良好的散热条件会延长产品的使用寿命,请把产品安装在通风良好的环境。
4. 请检查使用的LED电源输出电压电流，是否符合产品要求。
5. 出于安全考虑，推荐输入和输出(信号端除外)用0.75-1.5mm²PVC或橡胶线缆，并确保接线牢固，以免电线过热或接触不良触发事故。扁平电源线不适用。
6. 通电调试前，应确保所有接线正确，避免因接线错误而导致灯具损坏。
7. 如果发生故障，请勿私自维修；如果有疑问，请联系供应商。