

DALI-A01

Product Features


- For amplification of Dali signal drive capability.
- Signal can be amplified to 5 levels multiple times
- Adopt high-quality amplifying devices, with output signal capacity up to 300M
- It is mainly used in situations where the output drive capacity of the main controller is insufficient




Technical Parameters

Model		DALI-A01
Output	Accuracy Channels	1
	Voltage	9.5-22.5VDC
Input	Voltage	9.5-22.5VDC
	Signal	DALI signal
Others	Dimension	168*39.4*30 mm (L*W*H)
	Packing Size	470*200*220 mm(L*W*H),50pcs/6.0kg/Carton
	G.W	90g
	Working temp	-20℃ ~40℃
	Relative humidity	20~90% RH

Dimension(mm)

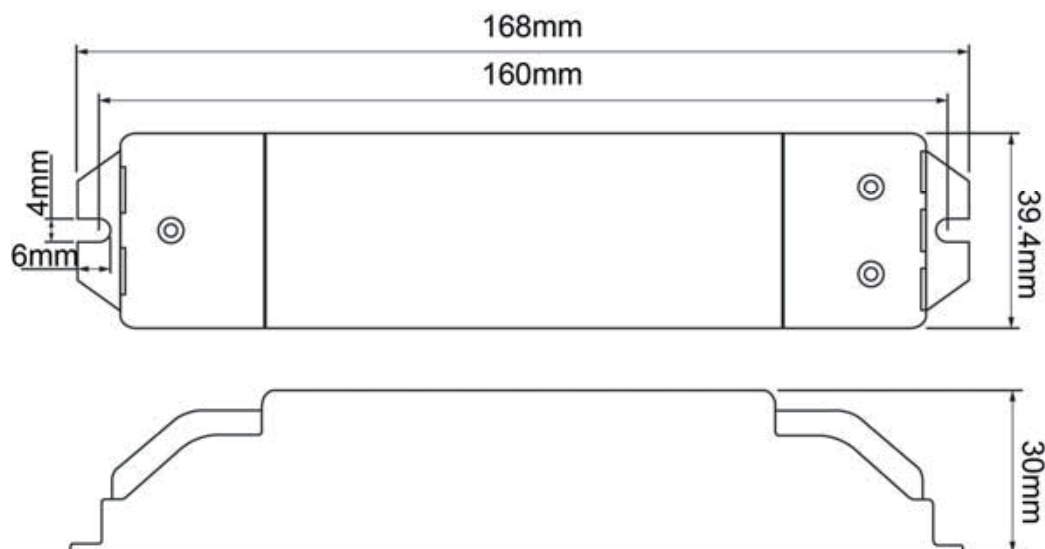

Wiring Diagram

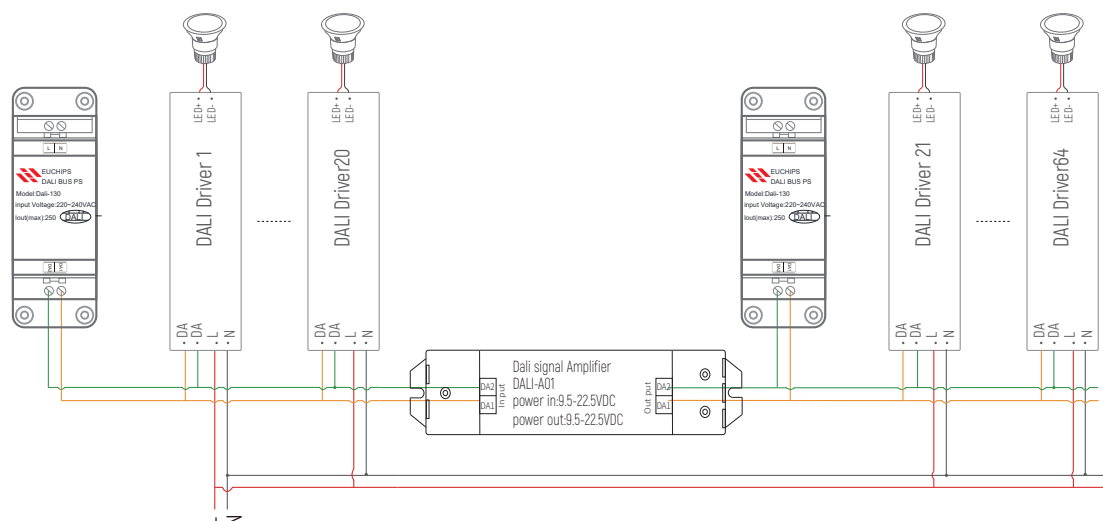

DALI-A01

产品特点


- 用于DALI信号驱动能力的放大。
- 信号可多次放大至5级
- 采用高品质的放大器件，输出信号能力可达300m
- 主要用于主控制器输出驱动能力不足の場合



技术参数

型号		DALI-A01
输出	通道数	1
	电压	9.5-22.5vDC
输入	电压	9.5-22.5vDC
	输入信号	DALI信号
其他	产品尺寸	168*39.4*30mm (长*宽*高)
	包装尺寸	470*200*220mm (长*宽*高), 50pcs/6.0kg/箱
	毛重	90g
	工作温度	-20°C~40°C
	相对湿度	20~90% RH

外观尺寸 (mm)

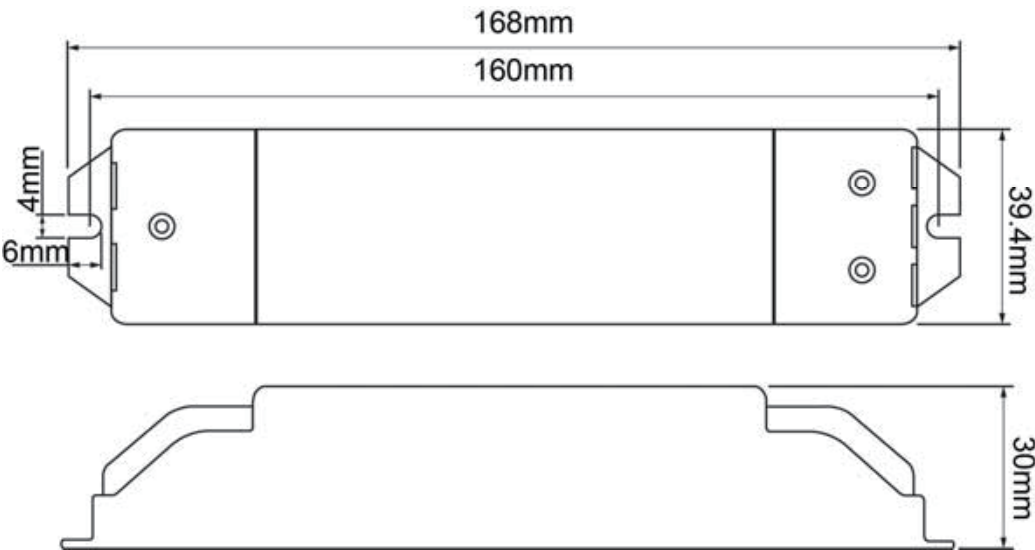

接线图

