

1-10V调光调色温旋钮

产品概述

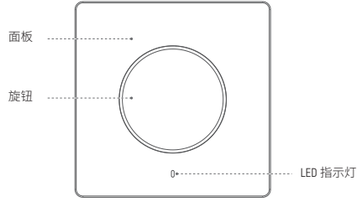

技术参数

型号	: WALLDIM203	产品代码	: 403400020201
输入电压	: 110-240V AC 50-60Hz	相对湿度	: 20~90%RH
输出电流	: 2CH×50mA	净重	:127g
输出信号	: 1-10V×2CH	毛重	:152g
工作温度	: -10°C~45°C	产品尺寸(mm)	: 86×86×57.5

尺寸(mm)



功能描述

开关: 单次短按，开/关灯。

调光: 长按旋钮2S ,白光指示灯亮起，进入调节亮度模式。顺时针调节旋钮，亮度增加，逆时针调节旋钮亮度逐渐减小。

调光调色温: 双击旋钮，黄光指示灯亮起，进入调节色温模式。

断电记忆: 产品具有断电记忆功能

输　　出: 输出2路1-10V ,信号每路最大50mA,CH1 调色温，CH2 调亮度。

注意事项: 输出信号不能短路，不能接入强电。以免损坏调光旋钮。

安装指南

1. 将电气盒安装到墙体。

2.用螺丝刀轻轻的撬开面板的缺口，取下白色面板，如下图所示。



3. 根据应用接线图进行接线。

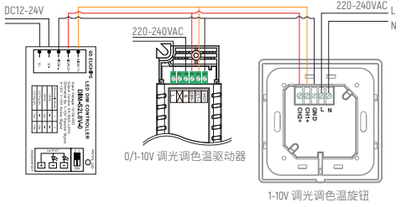

4. 用螺钉将底盖可靠地安装到墙上的电气盒内。



5.检查白色面板的方向，将其装在底盖上。





0-10V Tunable White Dimmer

Product Outline

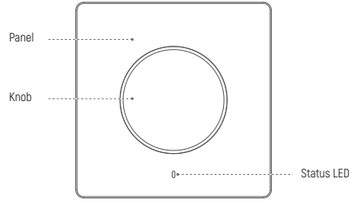

Technical Parameters

Model	: WALLDIM203	Product No.	: 403400020201
Input Voltage	: 110-240V AC 50-60Hz	Relative humidity	: 20-90%RH
Output Current	: 2CH×50mA	N.W.	: 127g
Output Signal	: 1-10V×2CH	G.W.	: 152g
Working temp.	: -10℃-45℃	Dimension(mm)	: 86×86×57.5

Dimension(mm)

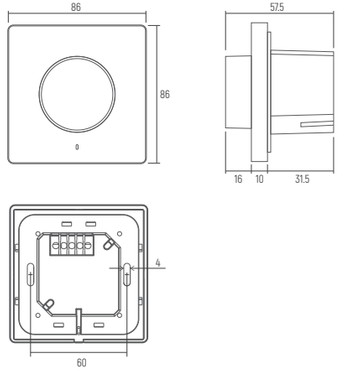

Function Description

Switch: single short press , on/off.

Dimming: long press the knob for 2S, the white indicator light will light up and enter into the brightness adjustment mode. Adjust the knob clockwise to increase brightness, Counterclockwise knob brightness to decrease the brightness.

Dimming color temperature: Double click the knob, yellow light indicator light up, enter the color temperature adjustment mode.

Power off memory: The product has power off memory function.

Output: 2 output of 1-10V signals, the maximum signal of each channel is 50mA; CH1 adjusts color temperature, CH2 adjusts brightness.

Note: The output signal should not be short-circuited or connected with high voltage to avoid burning dimming knob;

Installation Guide

1. Mount an electrical box inside the wall

2. To separate the panel and the back cover of the controller with a screwdriver along the gap of the back cover.



3. Connect the wires according to the"Wiring Diagram"

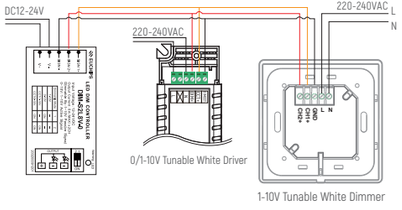

4. To put the back cover on the electrical box and fix it with the screw.



5.To buckle the glass panel to the bottom box.